

GENERAL DRAWING NOTES:

1. Material:

- a. Muntz Metal Alloy Number 280 or Naval Brass Alloy Number 464 with a minimum wall thickness of 3/32" (.09").

2. Finishes:

- a. Available in Polished, #4 Satin, #6 Satin, Non-Directional (Jitterbug) & Bead Blasted finishes.

3. Doors:

- a. Standard door thickness is 2".
- b. Available stile widths: 2 3/4" minimum.
- c. Available top rail heights: 2-3/4" minimum.
- d. Available bottom rail heights: 6" minimum (10" recommended to comply with ADA guidelines).
- e. Refer to section B detail 8 on page 7 for center rail detail.
- f. Refer to section B-3 for optional flush glazed glass stop configuration.
- g. Refer to section B page 15 for typical glass stop configurations to accommodate various glass thickness.

4. Frames:

- a. See details following for header profile required for specific power operator, and vertical jamb framing to properly support the power operator header.
- b. Refer to section B for framed sidelight and transom configurations with either applied glass stop configuration, B-1 & B-2 or flush glazed glass stop configuration, B-3.
- c. Consult factory for bottom load type power operator configuration if required for recessed header applications.

5. Door & Frame: Refer to section B-2 and section B page 15 for multi-light/true divided construction.



6. Threshold and floorbox types: Refer to section B pages 17 & 19 for details.

7. Door in open position/door projection: Refer to section B pages 16 & 18 for details.



8. Grilles: available, consult factory.

Concealed Shafts / Horton "Power Now" Side Load (O-1)

INTERIOR

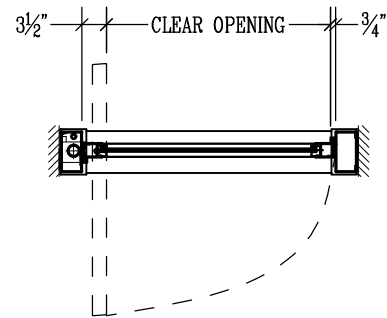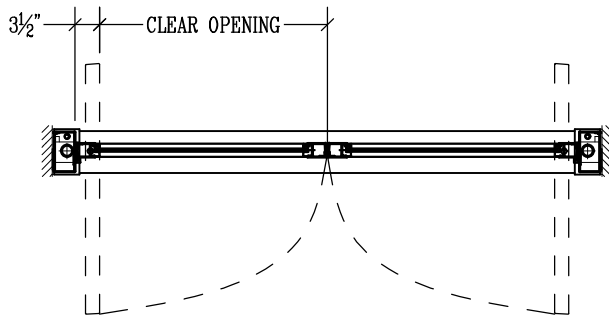



EXTERIOR
(Pull Side)

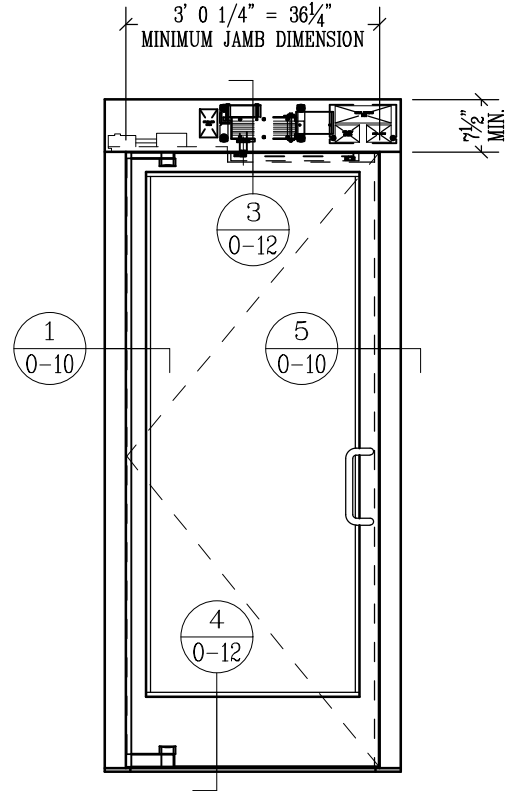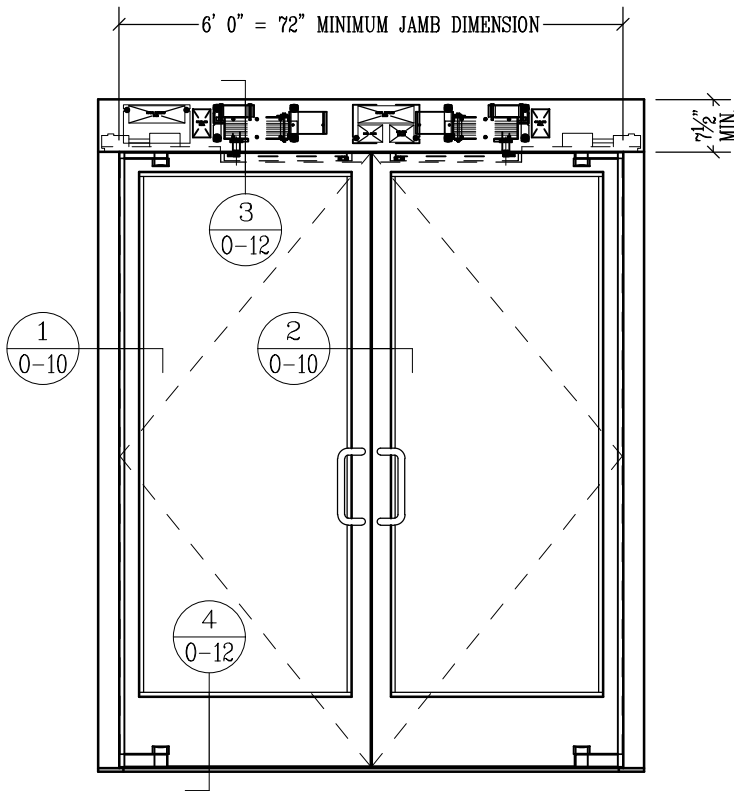



SHOWN WITH HORTON POWER OPERATORS

Concealed Shafts / Stanley "Power Now" Side Load (O-1)

INTERIOR

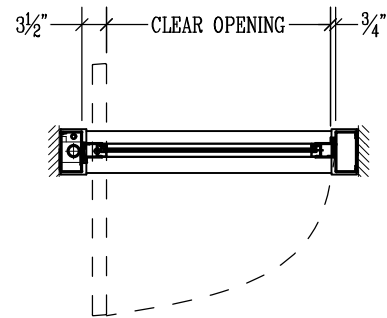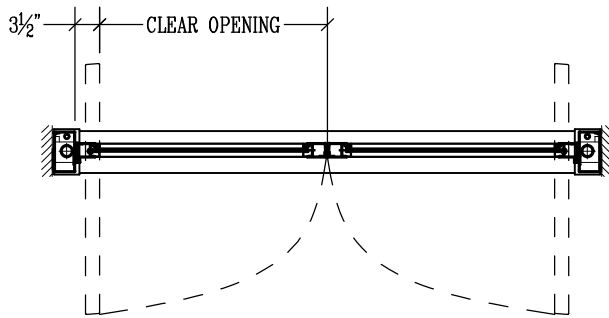



EXTERIOR
(Pull Side)

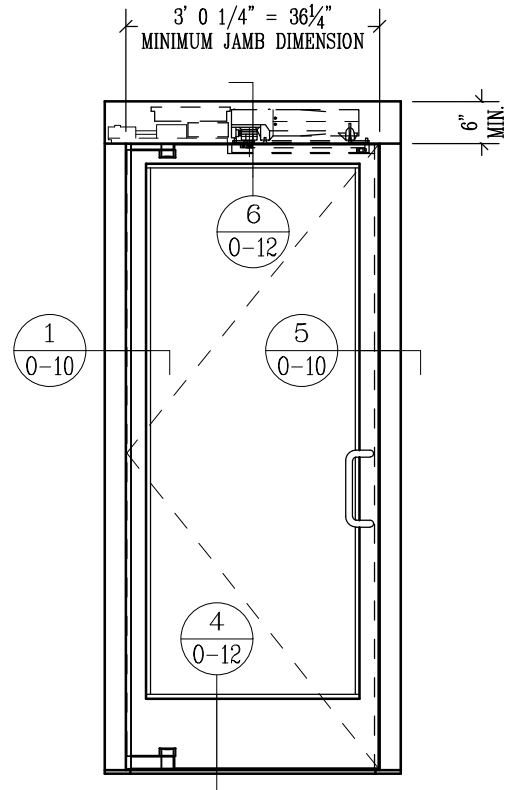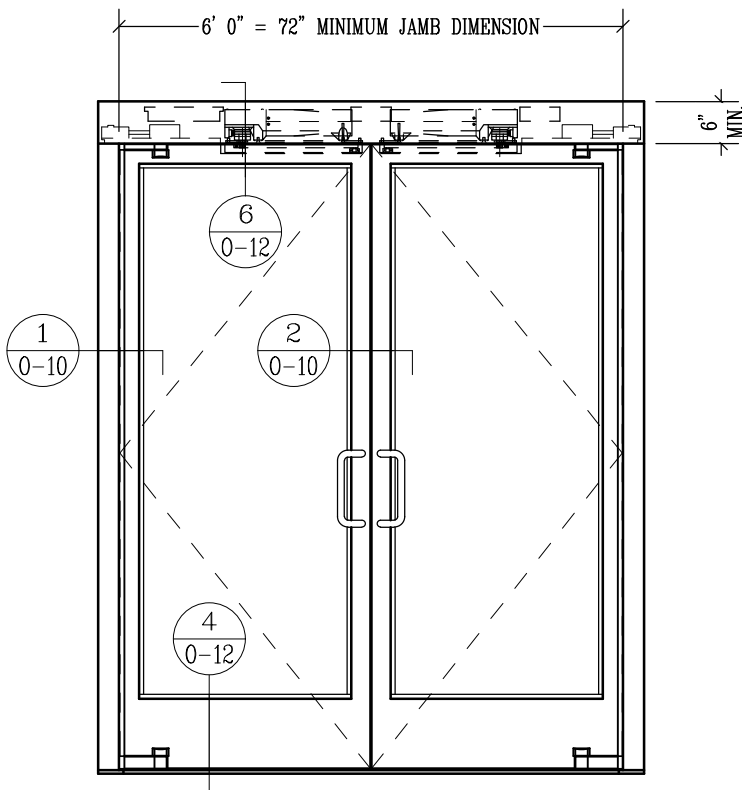



SHOWN WITH STANLEY POWER OPERATORS

Concealed Shafts / Stanley "Power Now" Bottom Load (O-1)

INTERIOR

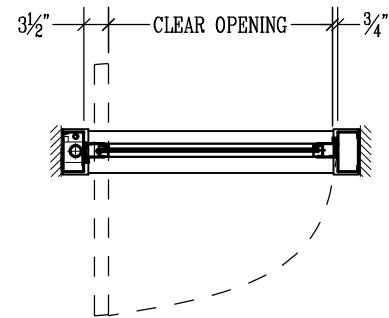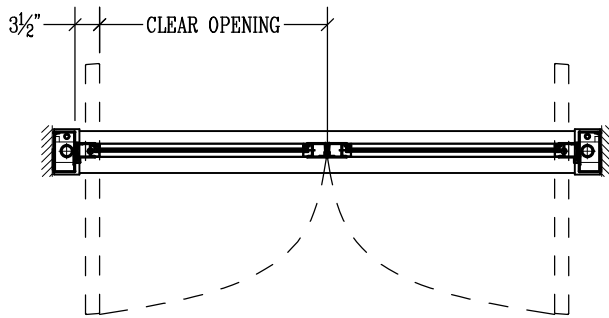



EXTERIOR
(Pull Side)

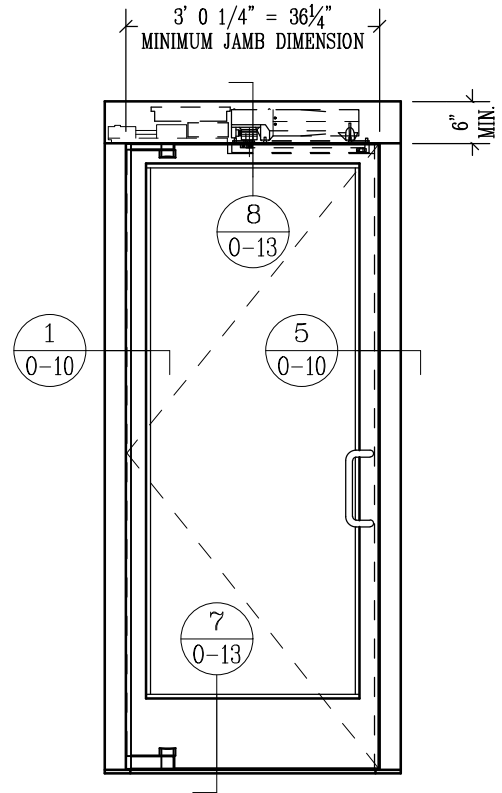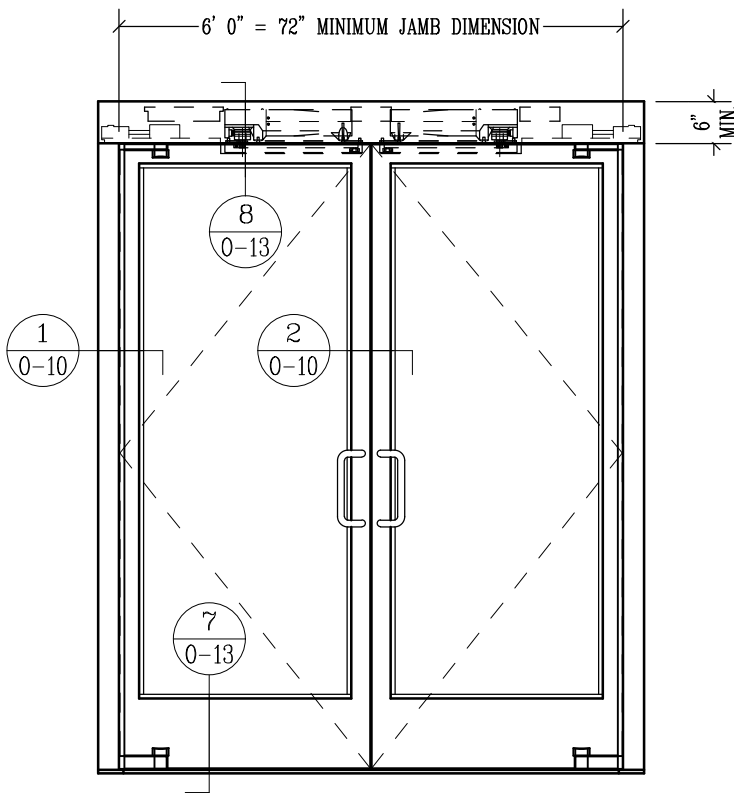



SHOWN WITH STANLEY POWER OPERATORS

Concealed Shafts / Record "Power Now" Side Load (O-1)

INTERIOR

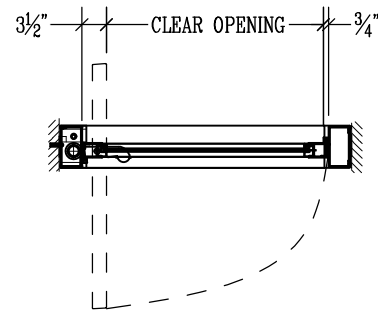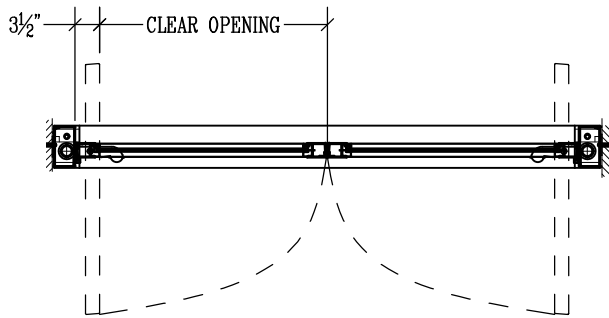



EXTERIOR
(Pull Side)

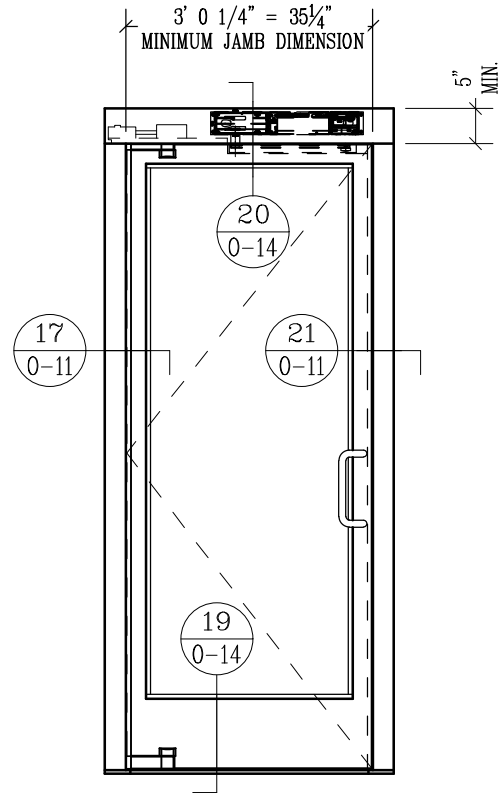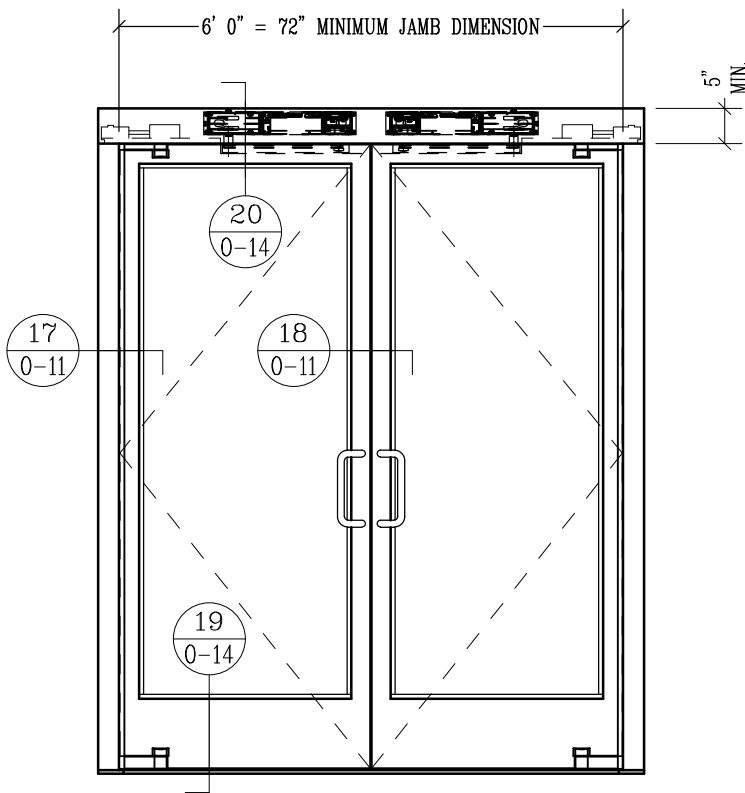



SHOWN WITH RECORD POWER OPERATORS

Exposed Shafts / Horton "Power Now" Side Load (O-2)

INTERIOR

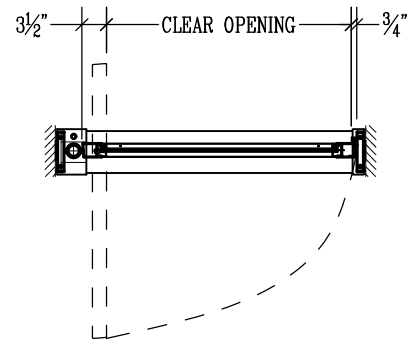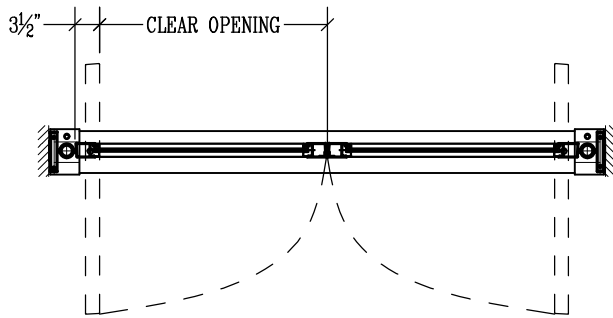



EXTERIOR
(Pull Side)

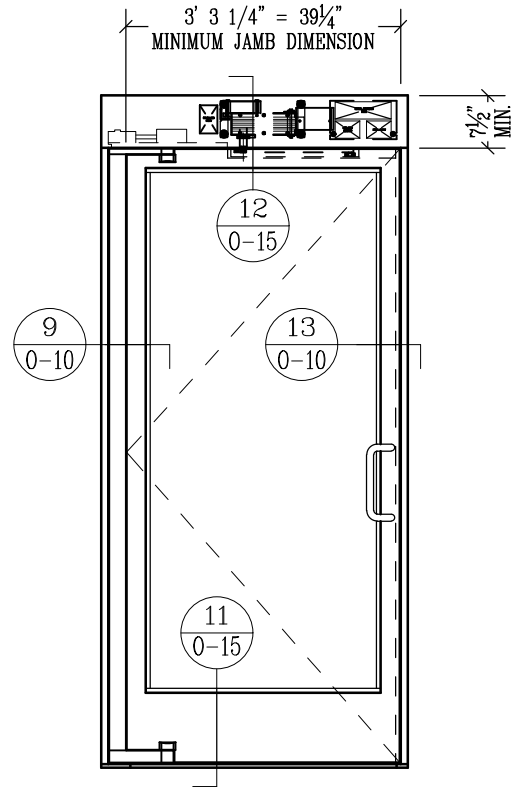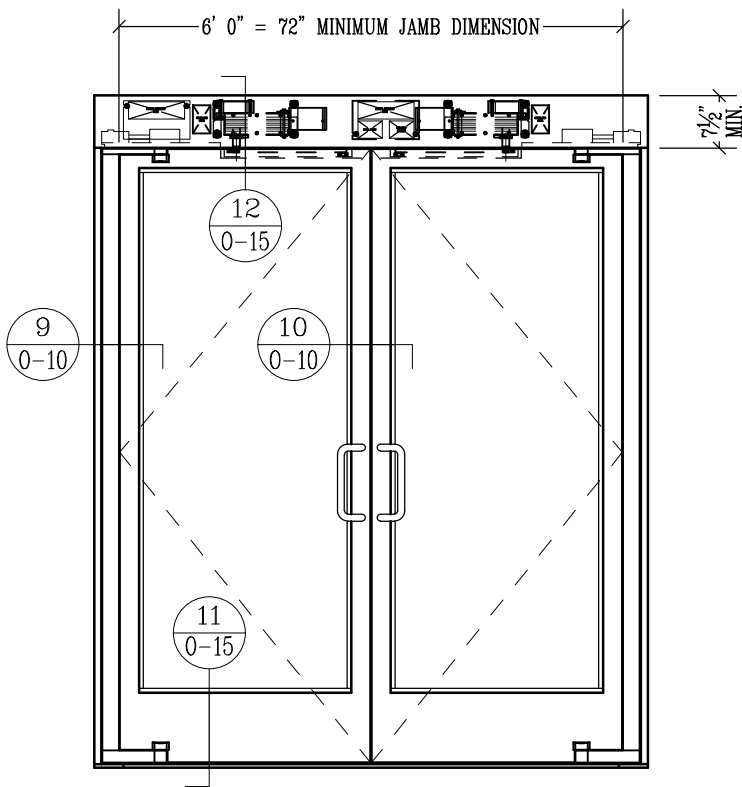



SHOWN WITH HORTON POWER OPERATORS

Exposed Shafts / Stanley "Power Now" Side Load (O-2)

INTERIOR

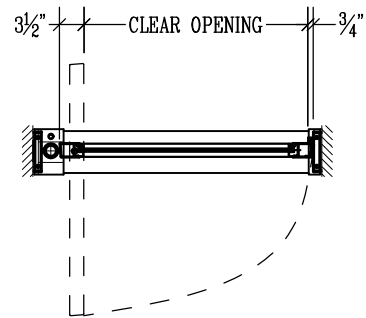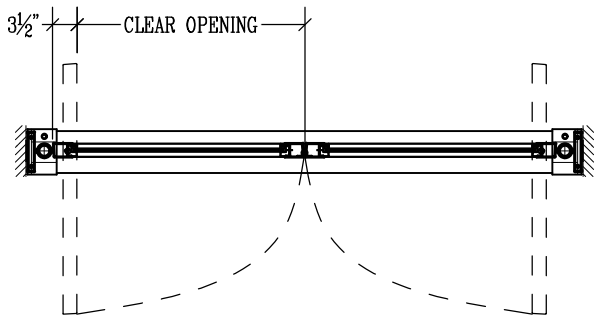



EXTERIOR
(Pull Side)

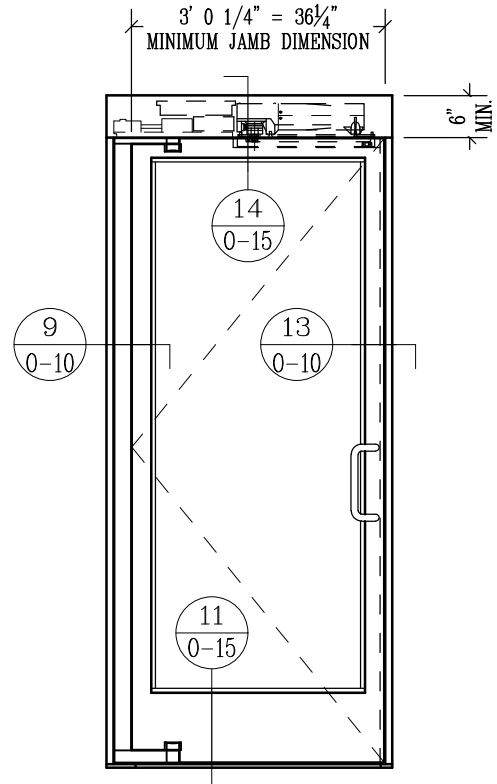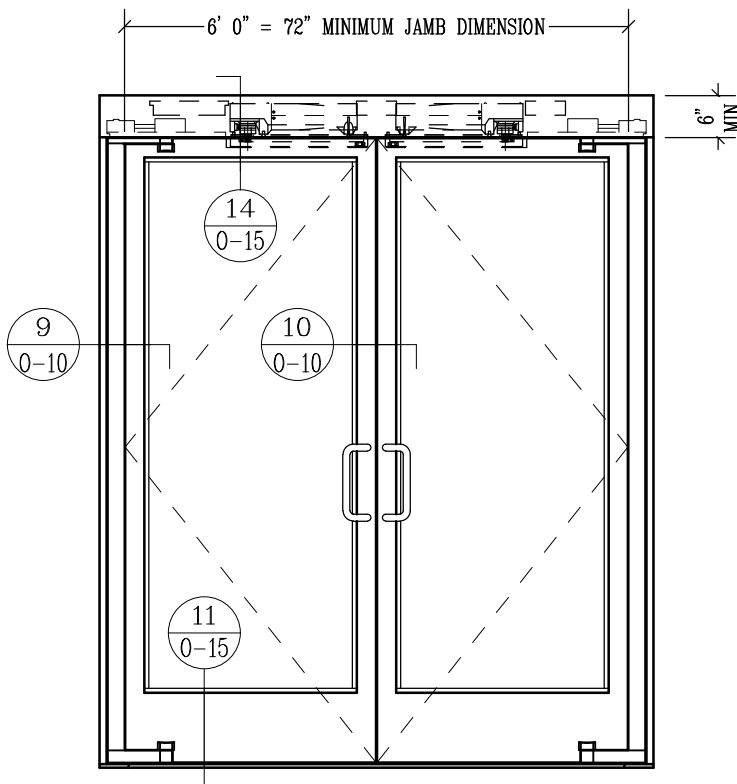



SHOWN WITH STANLEY POWER OPERATORS

Exposed Shafts / Stanley "Power Now" Bottom Load (O-2)

INTERIOR

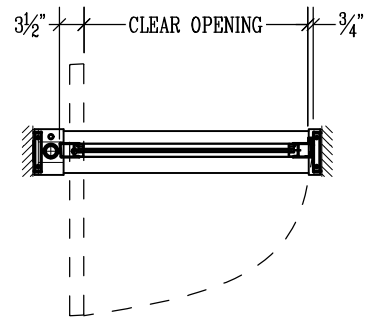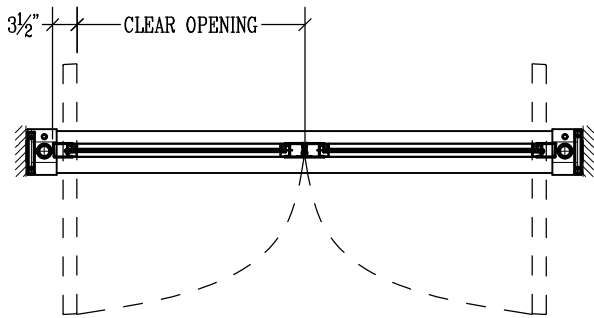



EXTERIOR
(Pull Side)

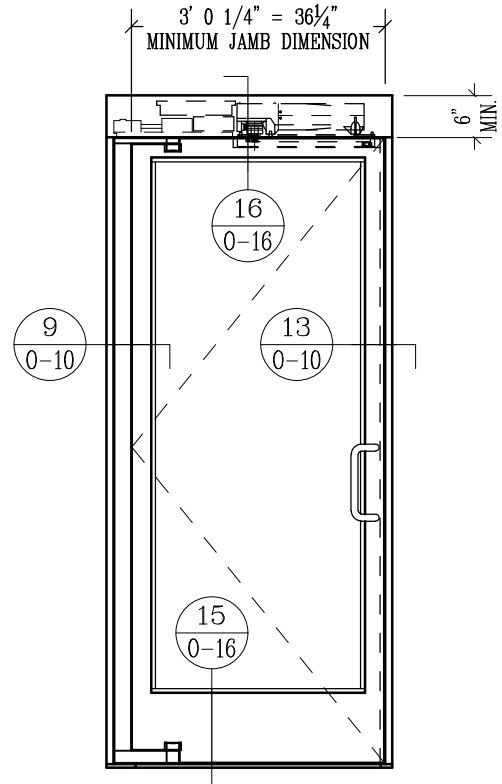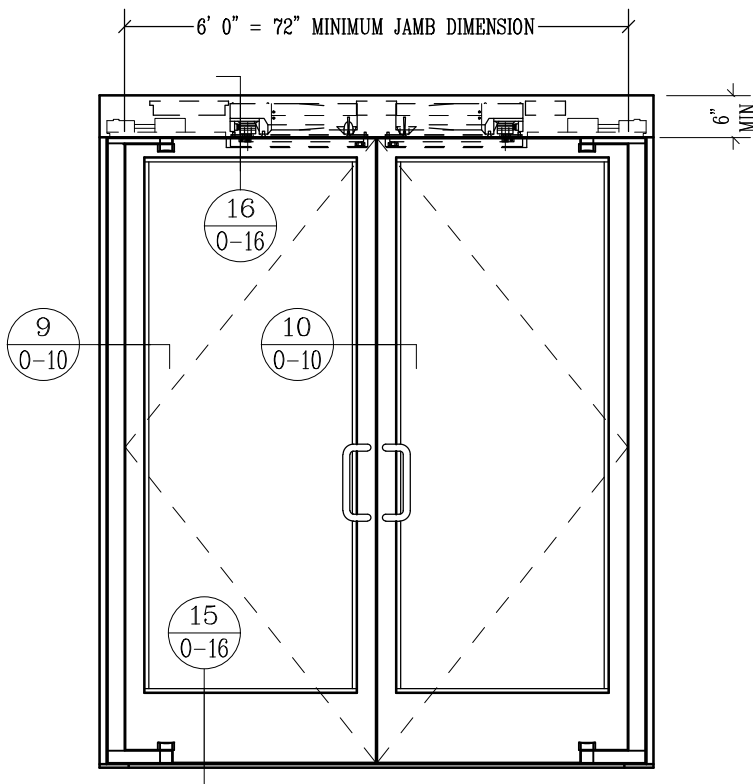



SHOWN WITH STANLEY POWER OPERATORS

Exposed Shafts / Record "Power Now" Side Load (O-2)

INTERIOR

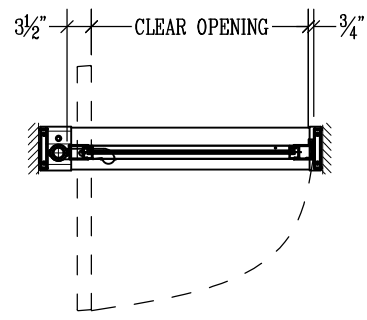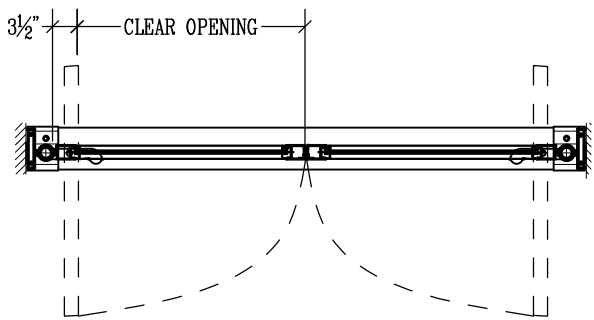


EXTERIOR
(Pull Side)

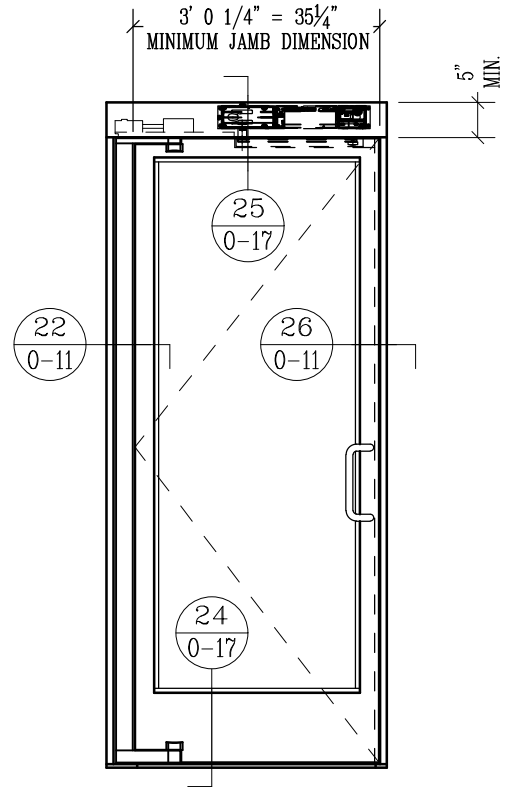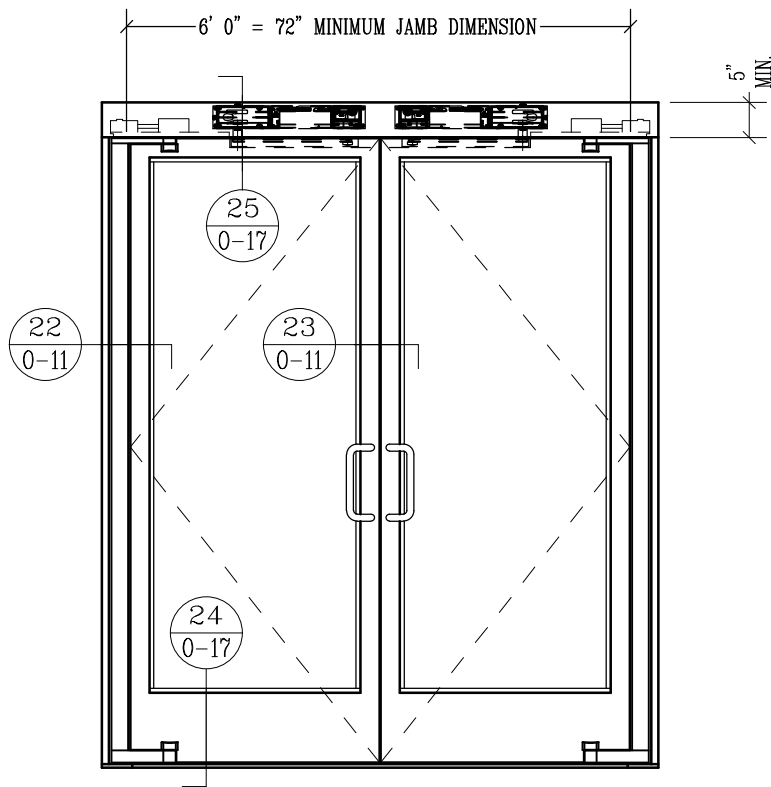


SHOWN WITH RECORD POWER OPERATORS


Stanley & Horton "Power Now" (O-1 & 2)

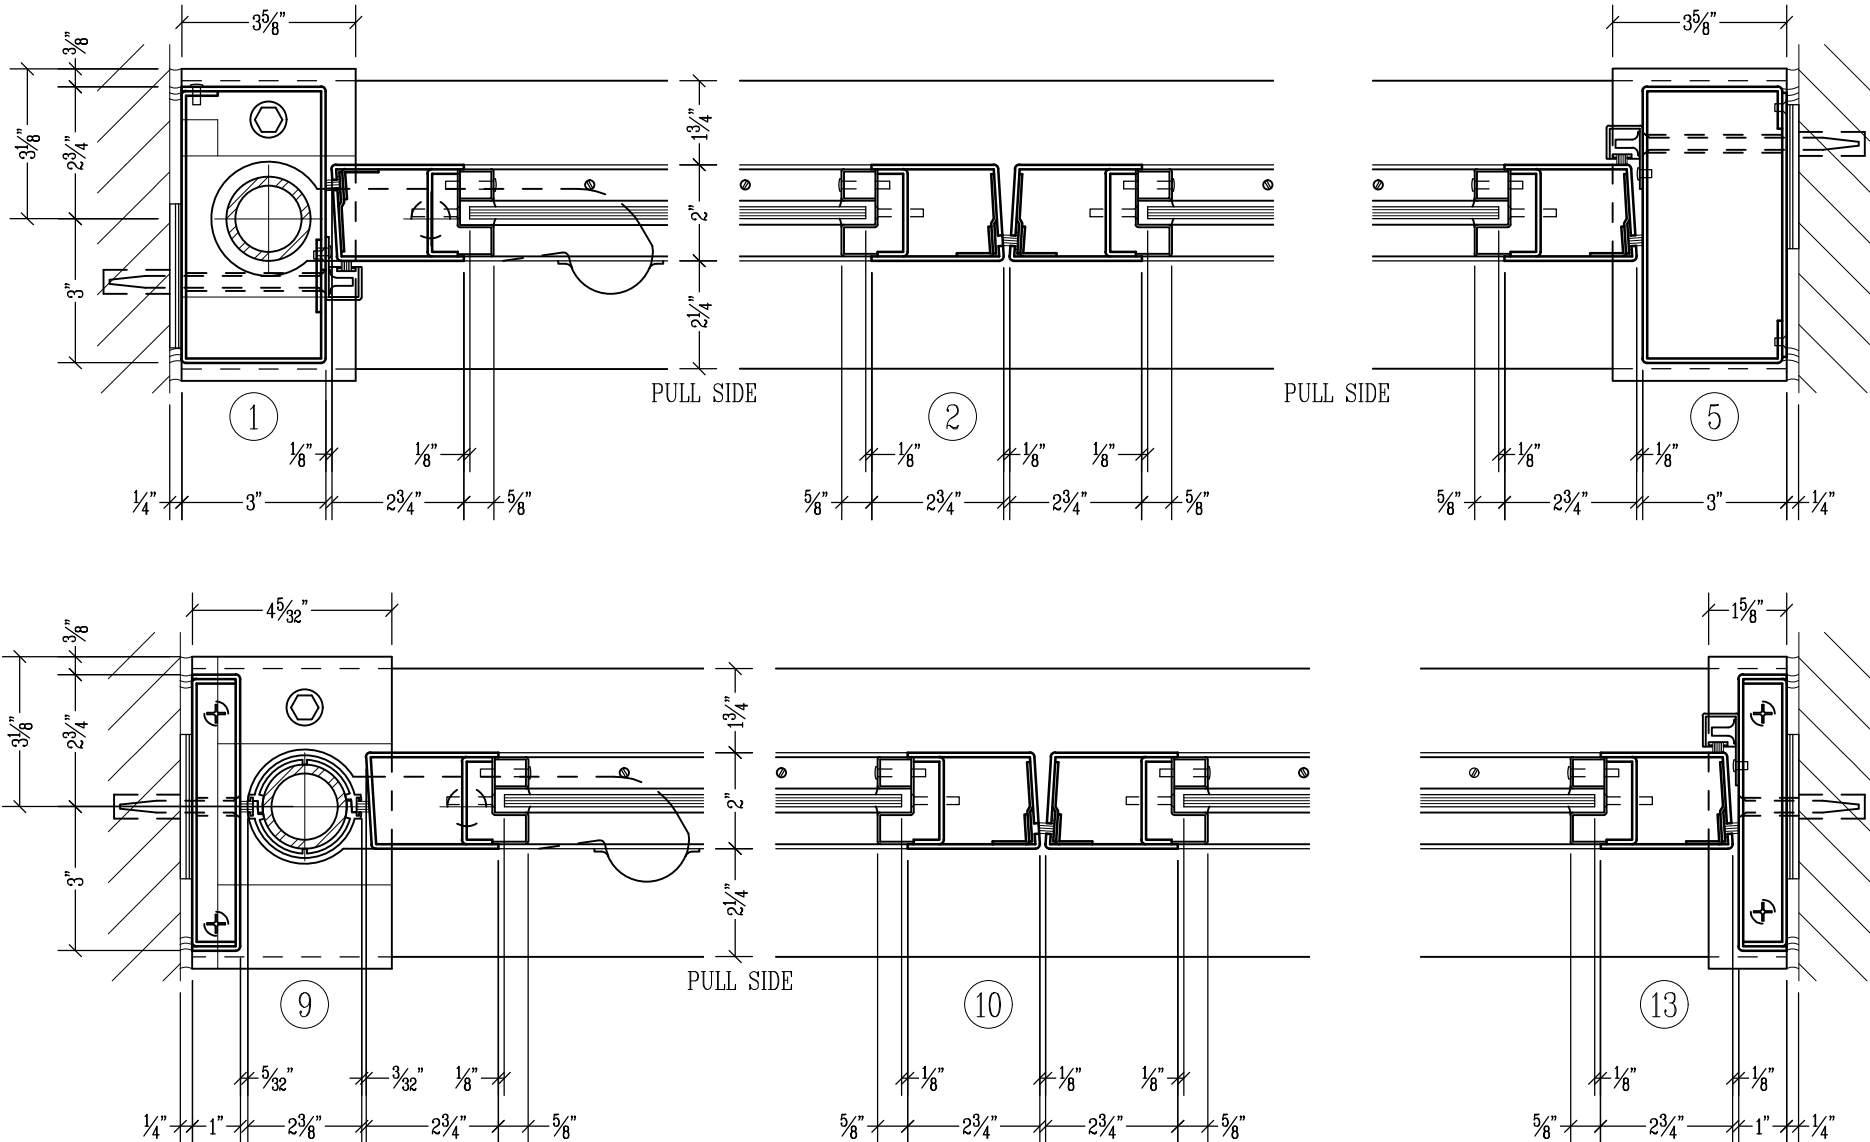

Record "Power Now" (O-1 & 2)

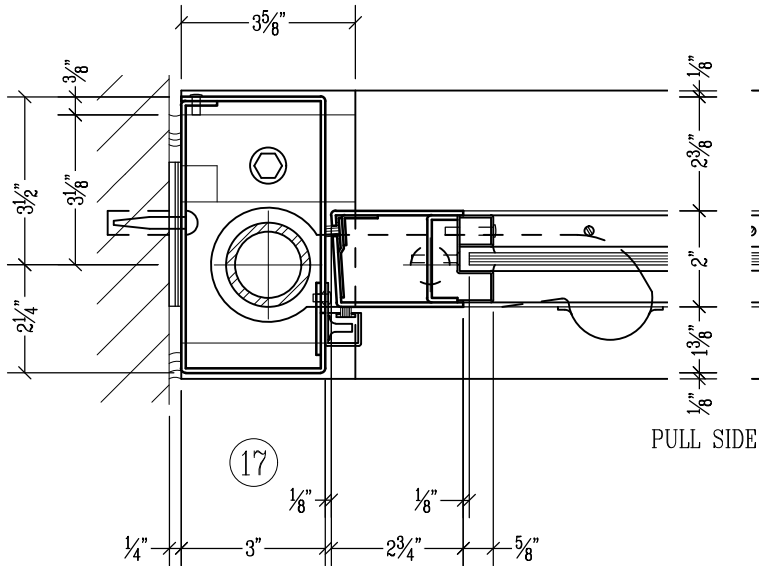


PULL SIDE

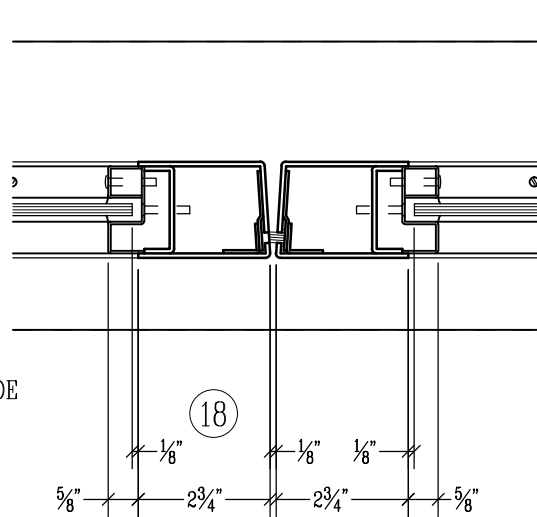


18


PULL SIDE

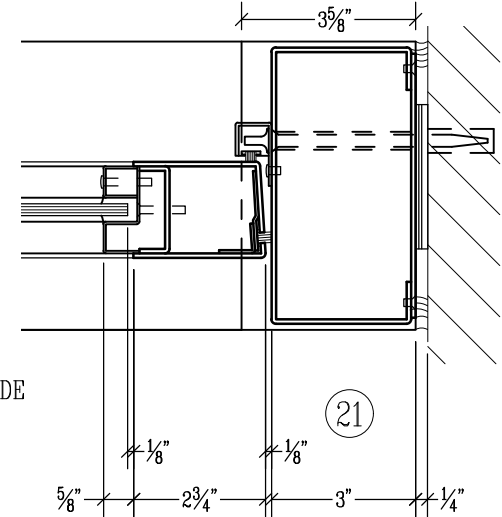


21

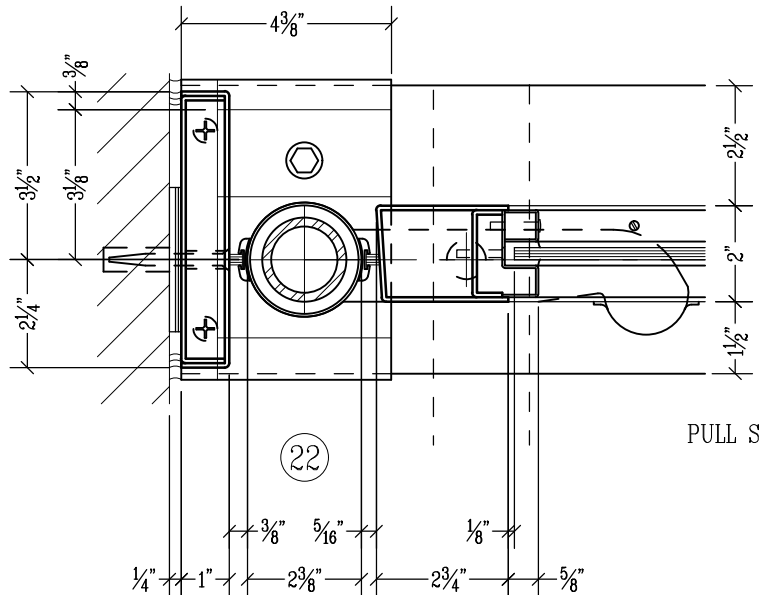

PULL SIDE

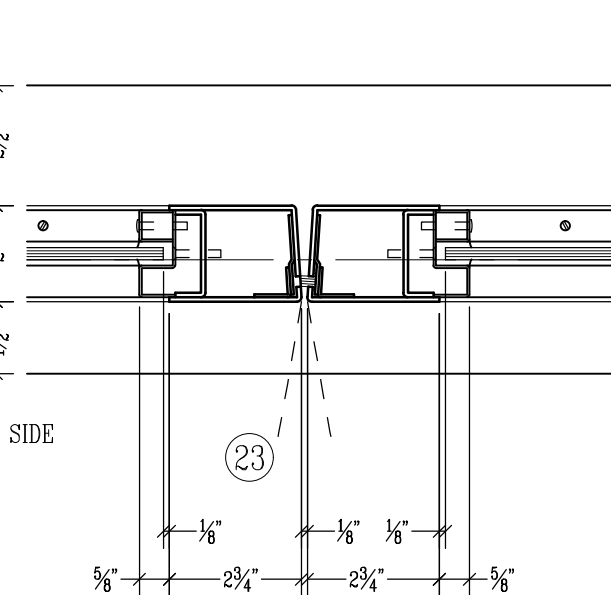


23

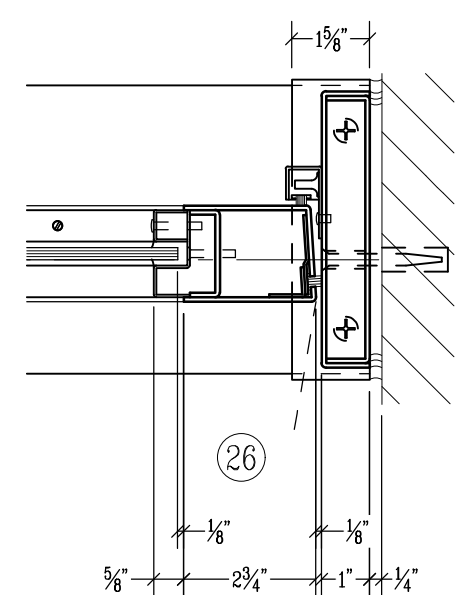



26

Concealed Shafts / Horton & Stanley "Power Now" Side Load (O-1)

Horton

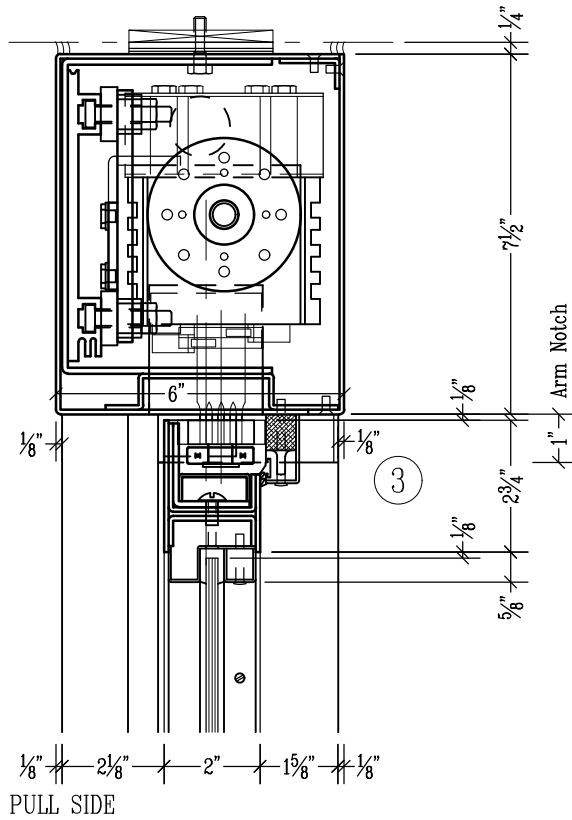



Stanley

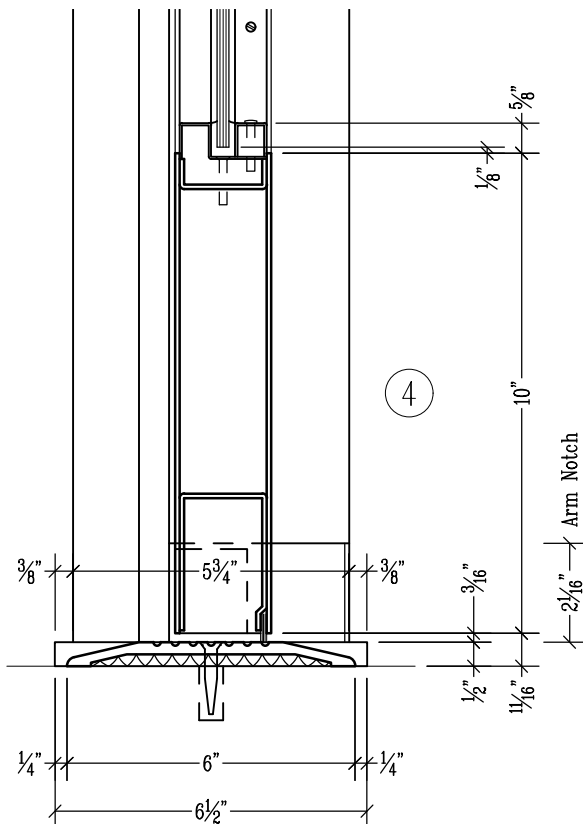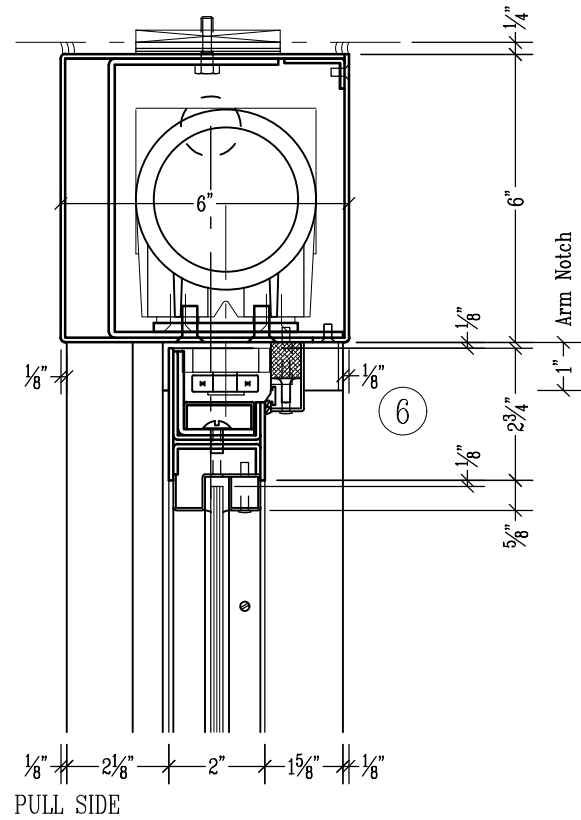

SCALE: 1/4" = 1"



Concealed Shafts / Stanley "Power Now" Bottom Load (O-1)

Stanley

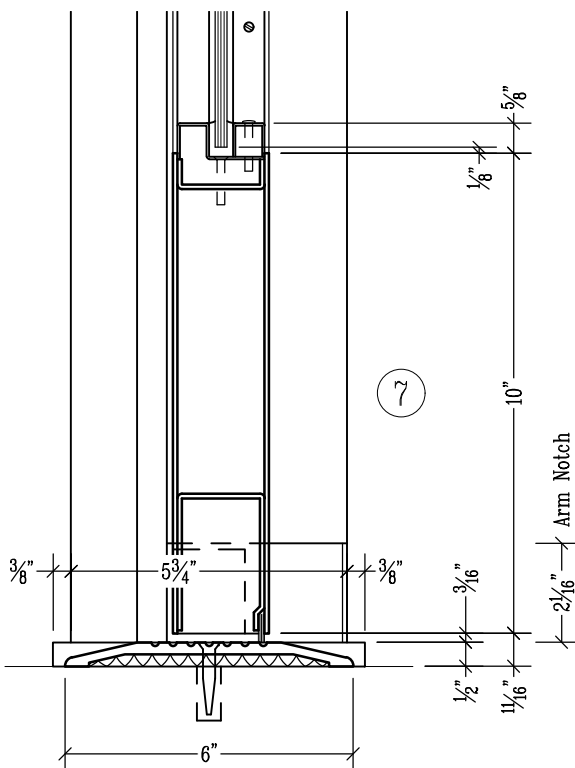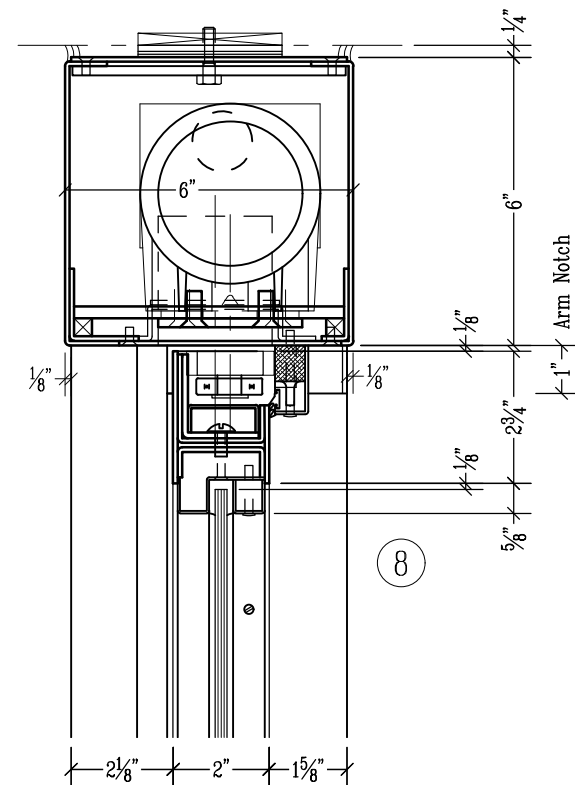

SCALE: 1/4" = 1"


Record

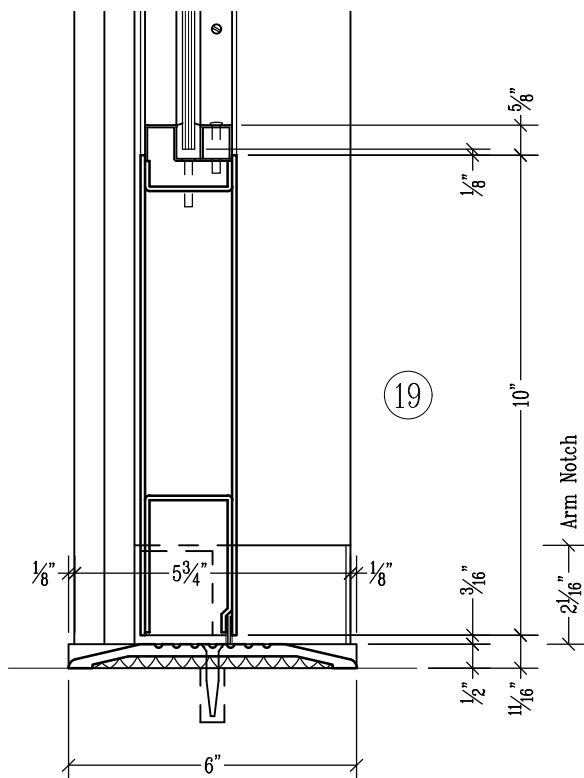



Page No. 14

Exposed Shafts / Horton & Stanley "Power Now" Side Load (O-2)

Horton

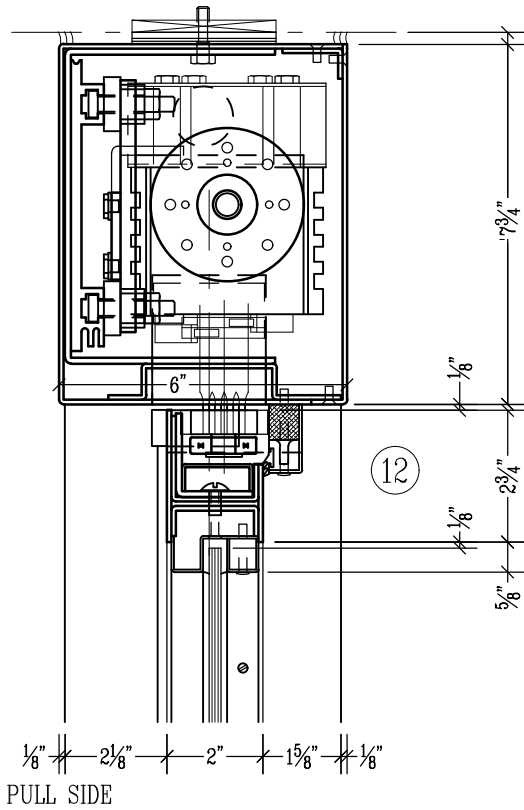


Stanley

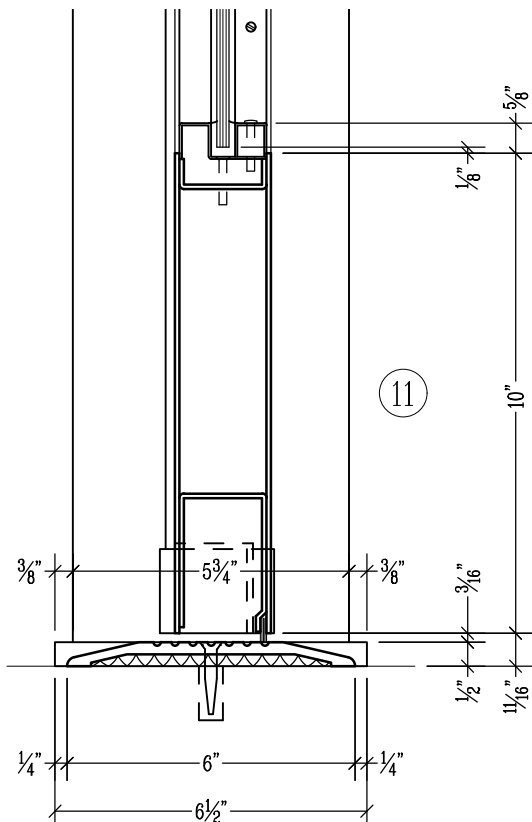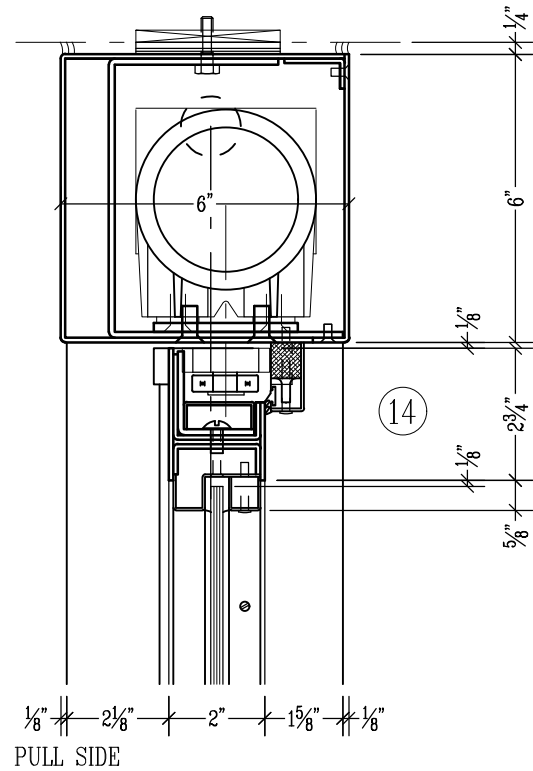


SCALE: 1/4" = 1"

Exposed Shafts / Stanley "Power Now" Bottom Load (O-2)

Stanley

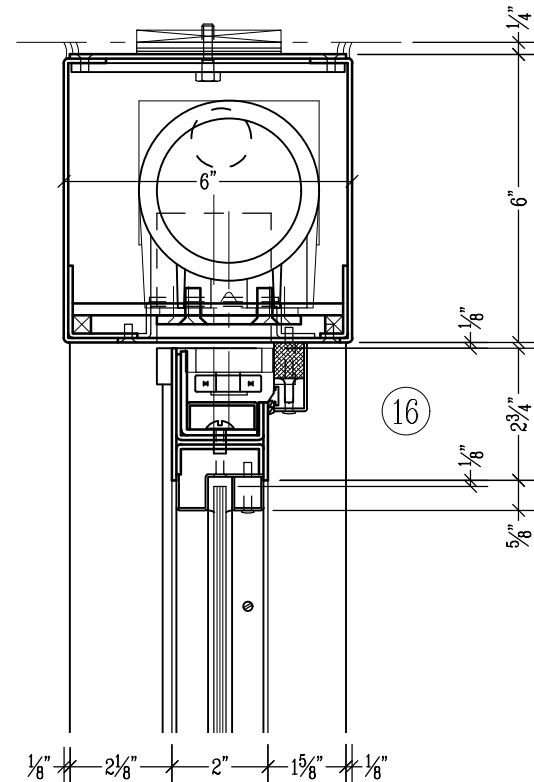


1/8" 2 1/8" 2" 1 5/8" 1/8"
PULL SIDE

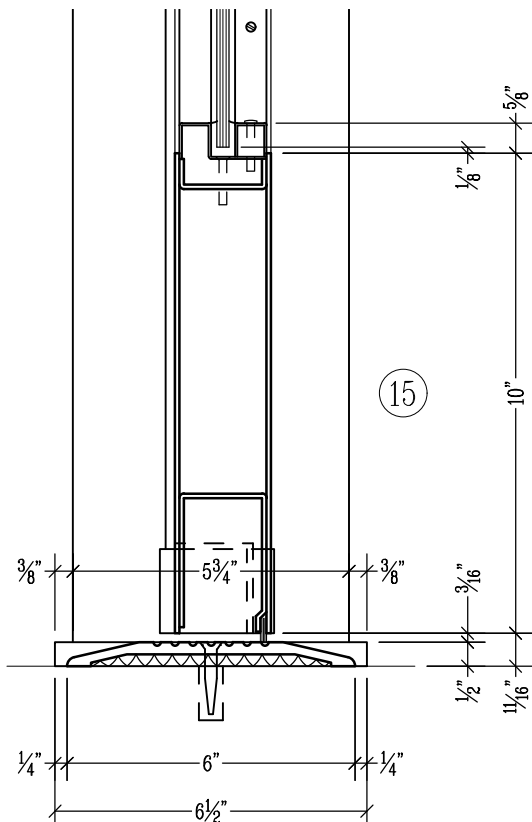

SCALE: 1/4" = 1"

Record

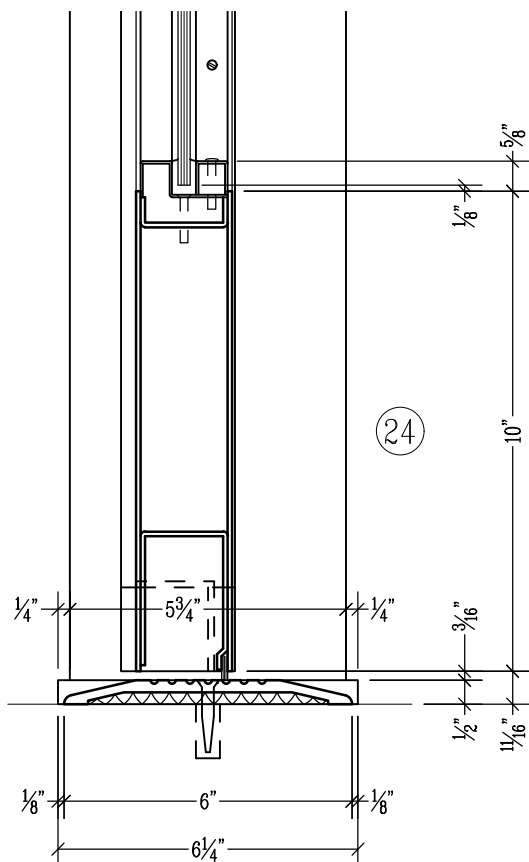

125 West Main Street / Falconer, New York 14733 / Tel. 800-665-6445 Fax 716-665-5552 / www.ellisonbronze.com