

GENERAL DRAWING NOTES:

1. Material:

- a. Extruded aluminum alloy 6063-T6 with a minimum wall thickness of 1/8".

2. Finishes:

- a. Available in anodized, kynar painted and powder coat paint finishes.

3. Doors:

- a. Standard door thickness is 2" nominal.
- b. Available stile widths: 1".
- c. Available top rail heights: 4 3/4".
- d. Available bottom rail heights: 4 3/4" and 10" or greater using dress plates (10" recommended to comply with ADA guidelines).

4. Frames:



- a. See details following for header profile required for specific power operator, and vertical jamb framing to properly support the power operator header.
- b. Refer to sections J-1 & J-2 for framed sidelight and transom configurations with applied glass stop configuration.
- c. Refer to section J-4 for tempered glass sidelight configuration.
- d. Refer to section J-2 for multi-light/true divided construction.
- e. Consult factory for bottom load type power operator configuration if required for recessed header applications.

5. Threshold and floorbox types: Refer to section J pages 16 & 18 for details.



6. Door in open position/door projection: Refer to section J pages 15 & 17 for details.

Concealed Shafts / Horton "Power Now" Side Load (S-1)

INTERIOR

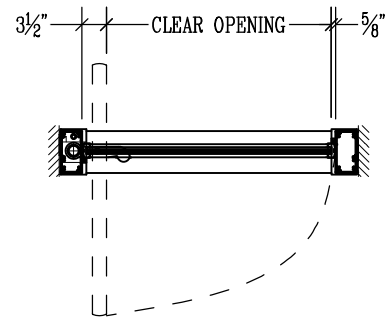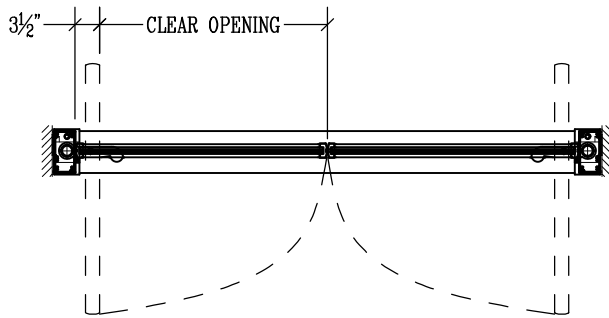



EXTERIOR
(Pull Side)

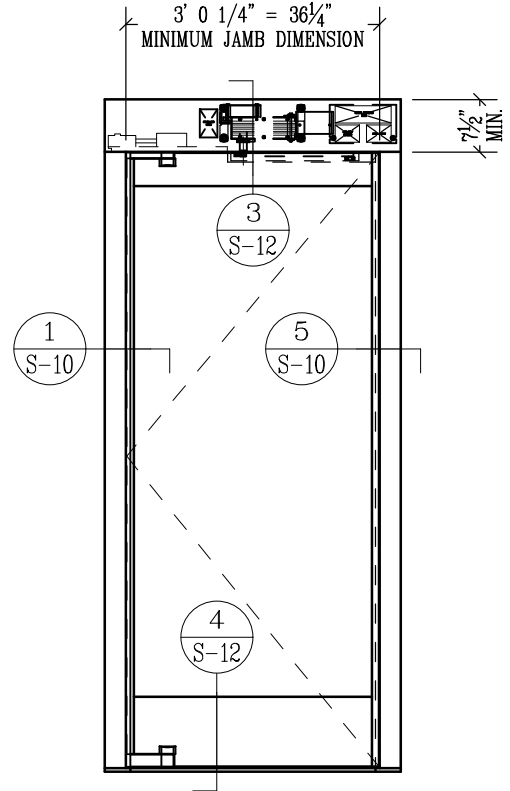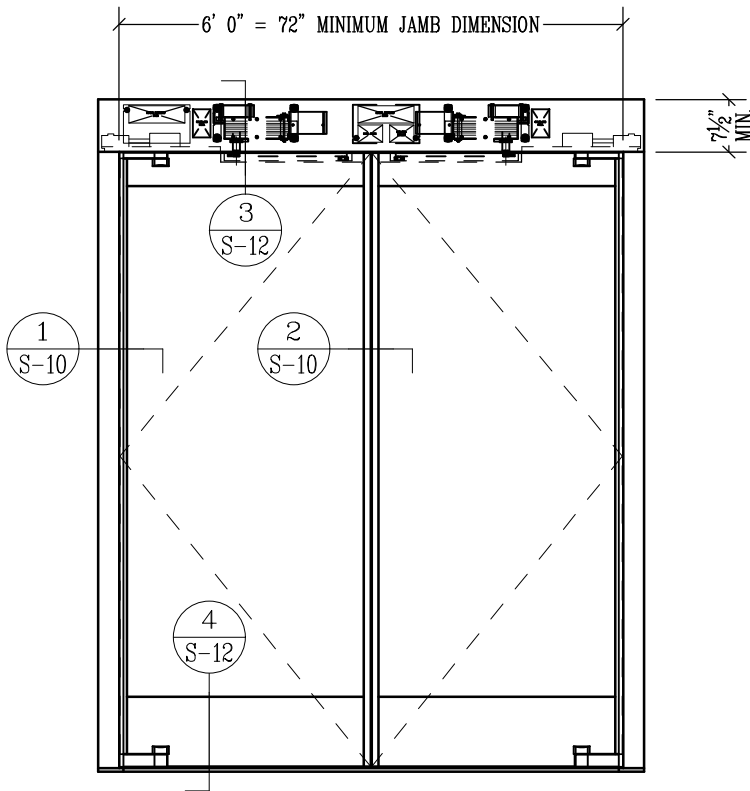



SHOWN WITH HORTON POWER OPERATORS

Concealed Shafts / Stanley "Power Now" Side Load (S-1)

INTERIOR

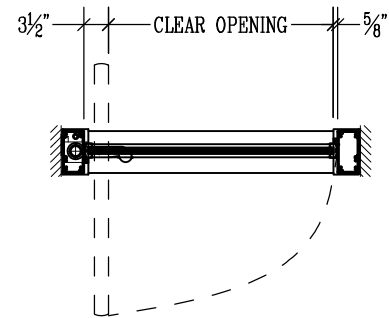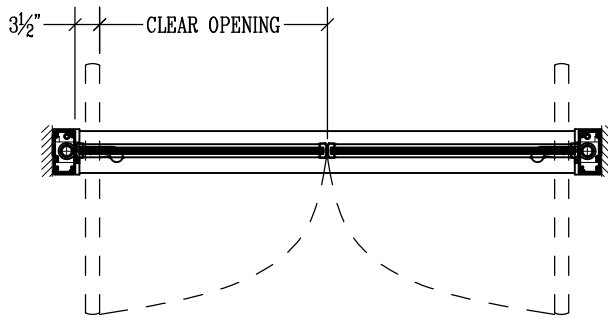



EXTERIOR
(Pull Side)

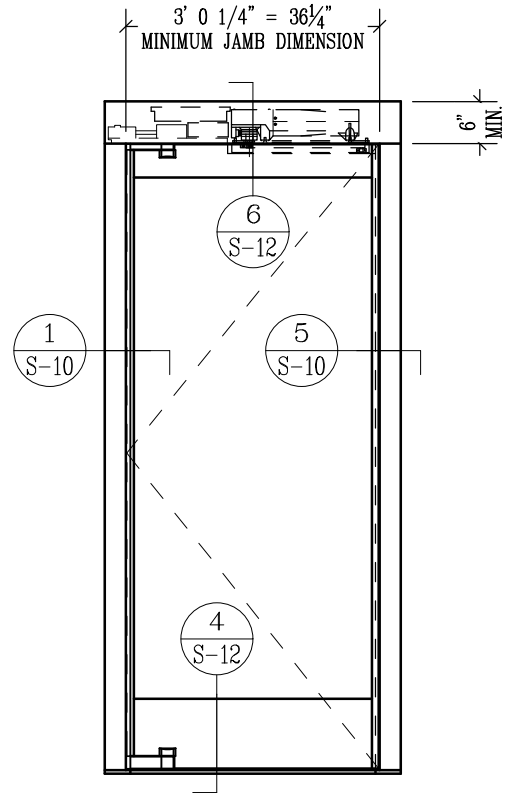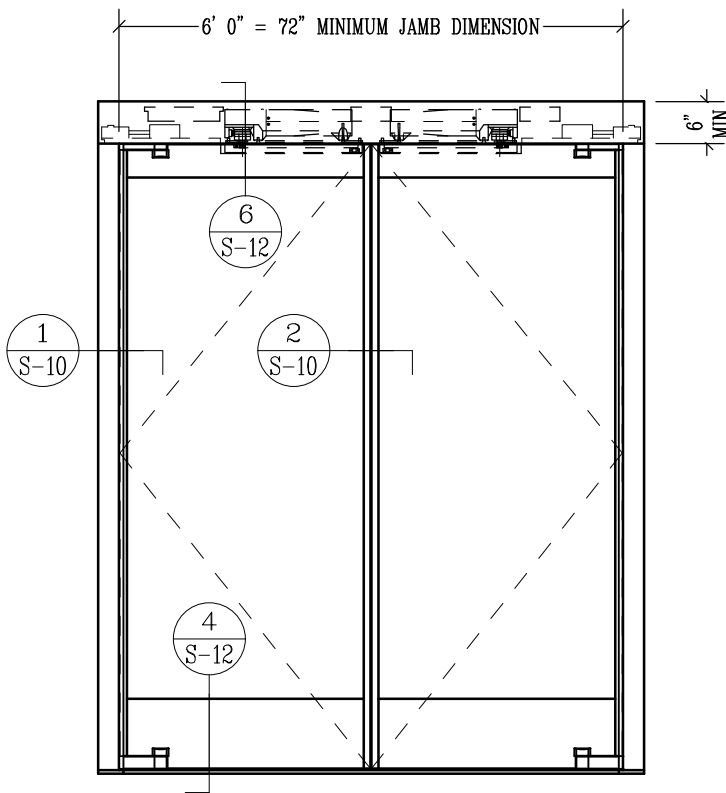



SHOWN WITH STANLEY POWER OPERATORS

Concealed Shafts / Stanley "Power Now" Bottom Load (S-1)

INTERIOR

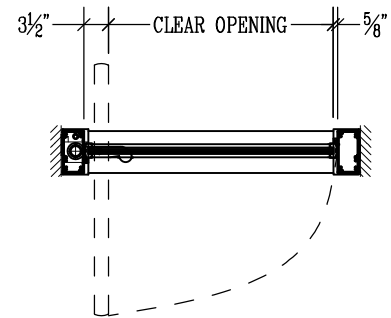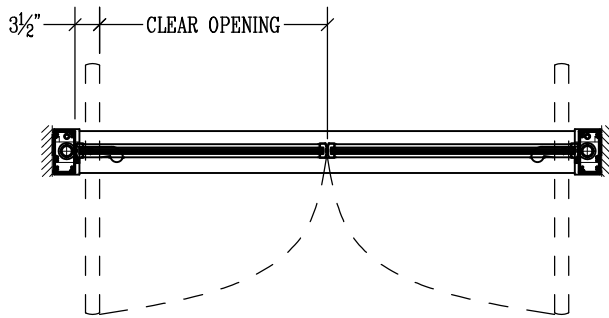



EXTERIOR
(Pull Side)

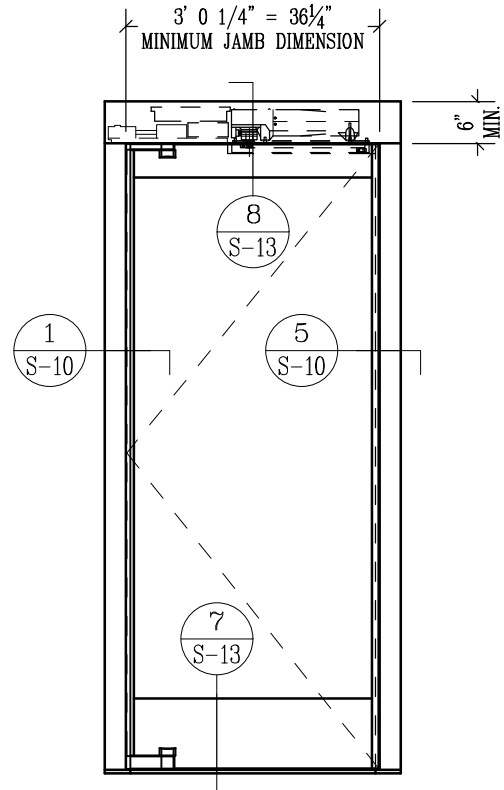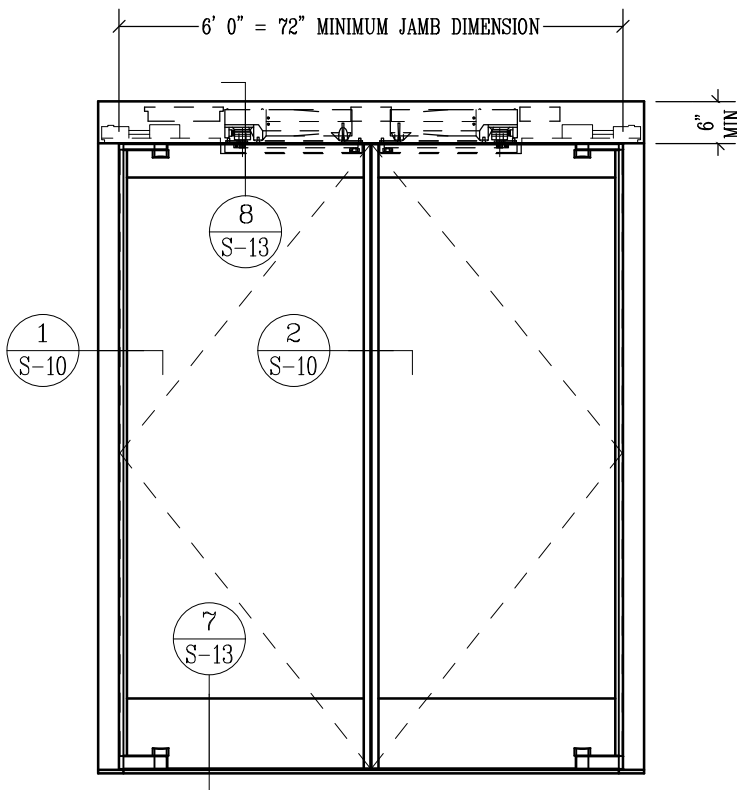



SHOWN WITH STANLEY POWER OPERATORS

Concealed Shafts / Record "Power Now" Side Load (S-1)

INTERIOR

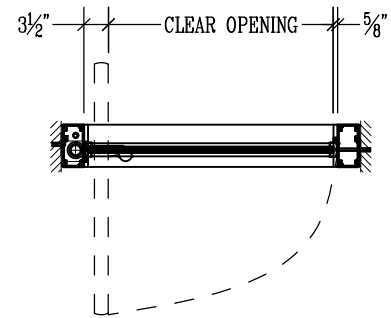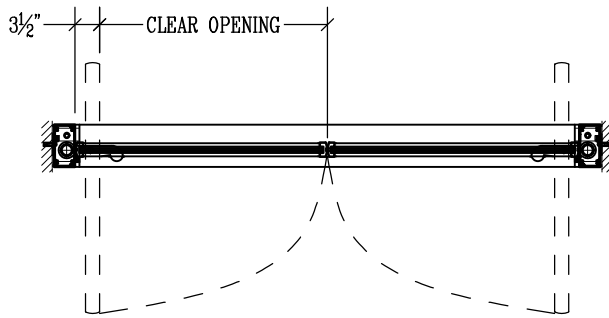



EXTERIOR
(Pull Side)

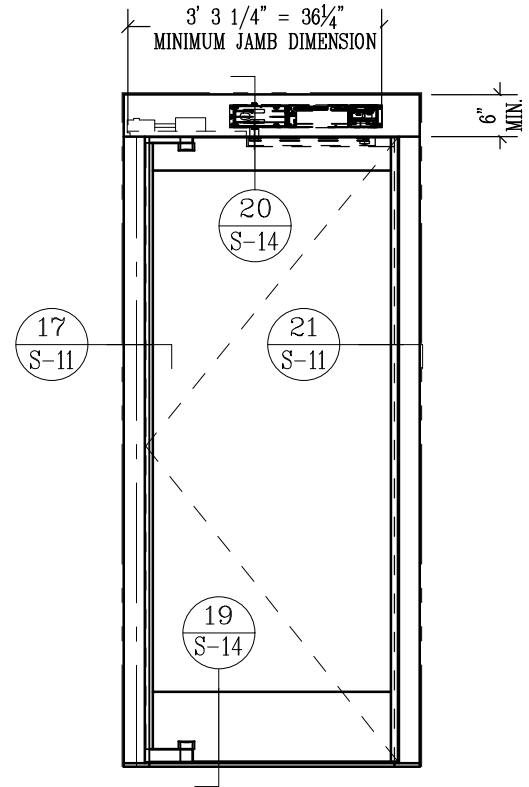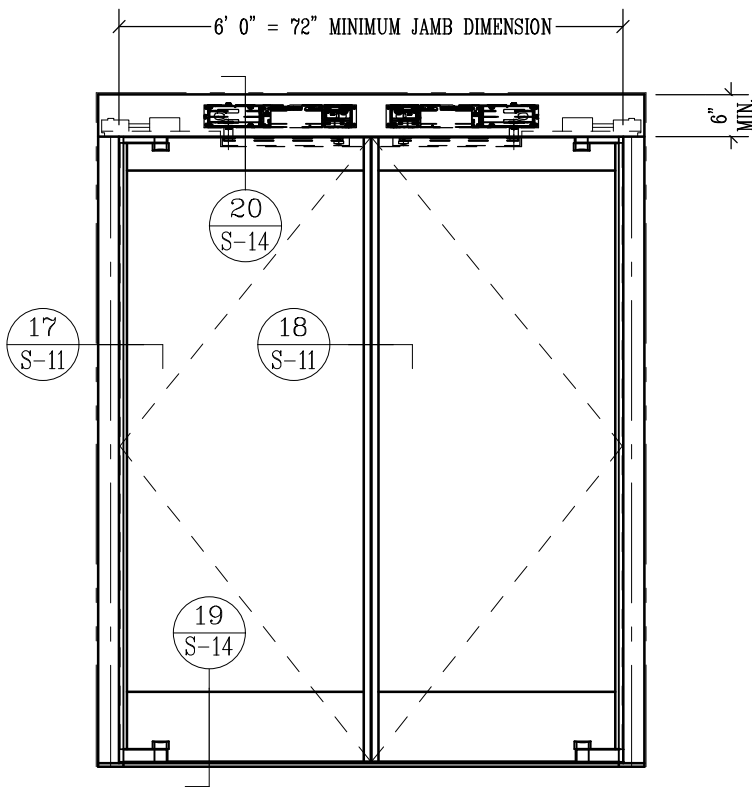



SHOWN WITH RECORD POWER OPERATORS

Exposed Shafts / Horton "Power Now" Side Load (S-2)

INTERIOR

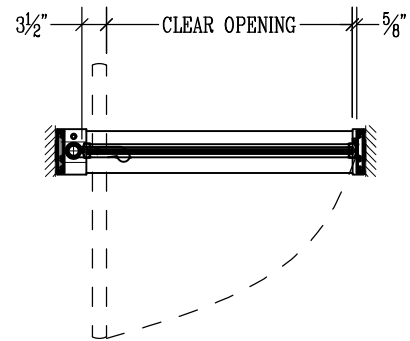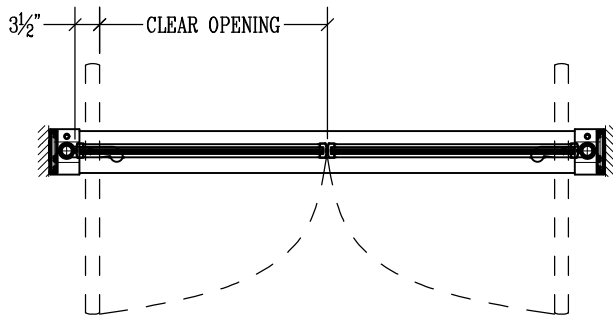



EXTERIOR
(Pull Side)

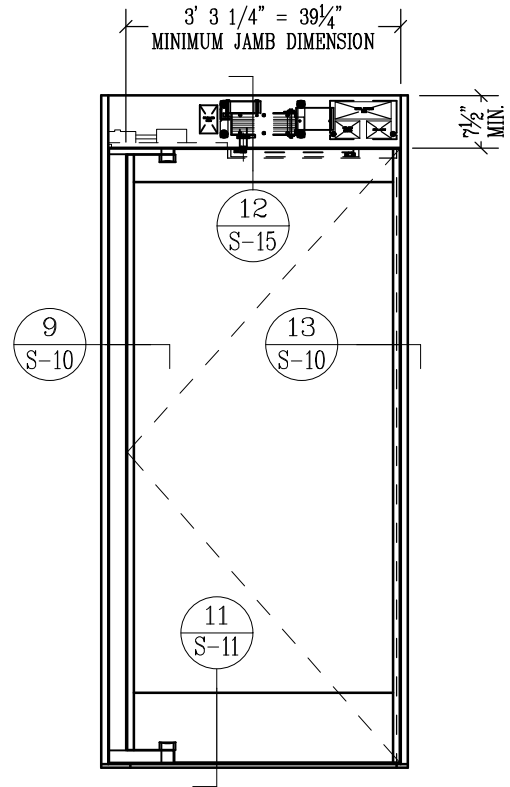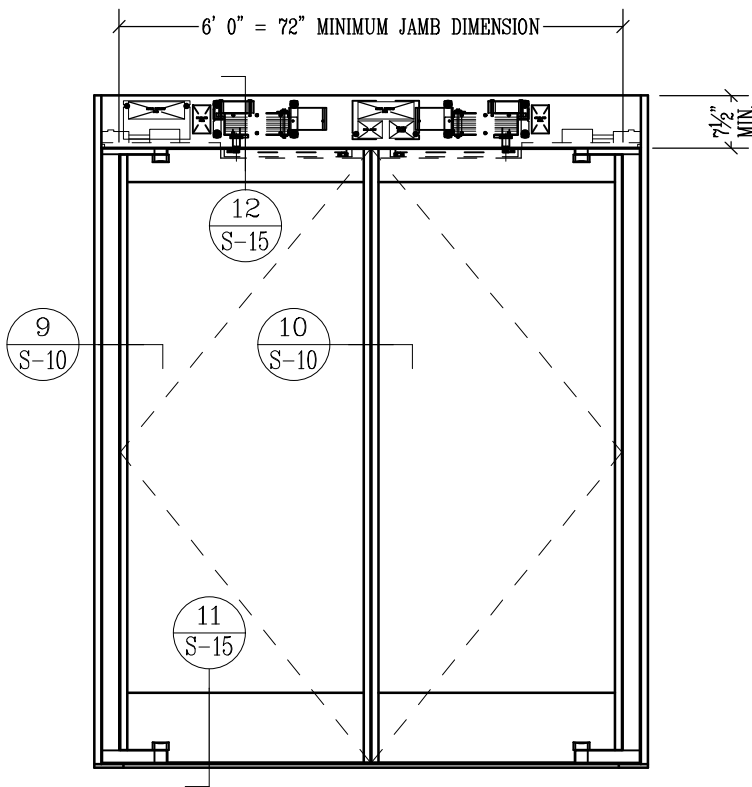



SHOWN WITH HORTON POWER OPERATORS

Exposed Shafts / Stanley "Power Now" Side Load (S-2)

INTERIOR

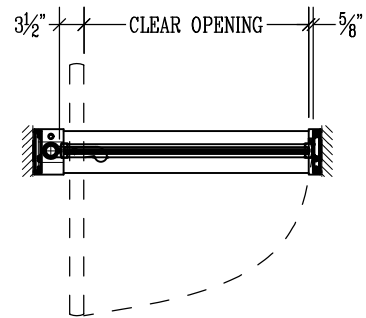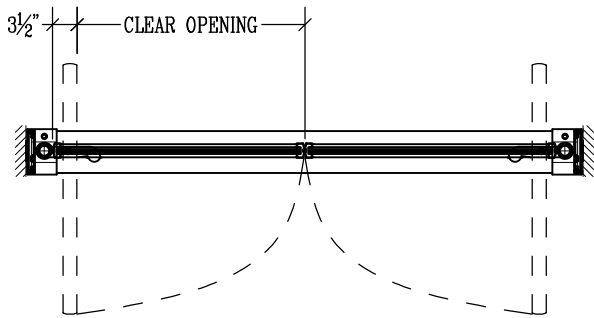



EXTERIOR
(Pull Side)

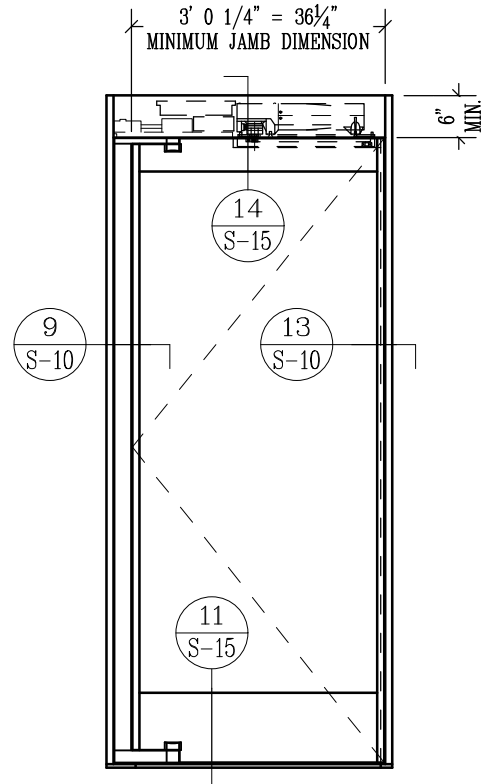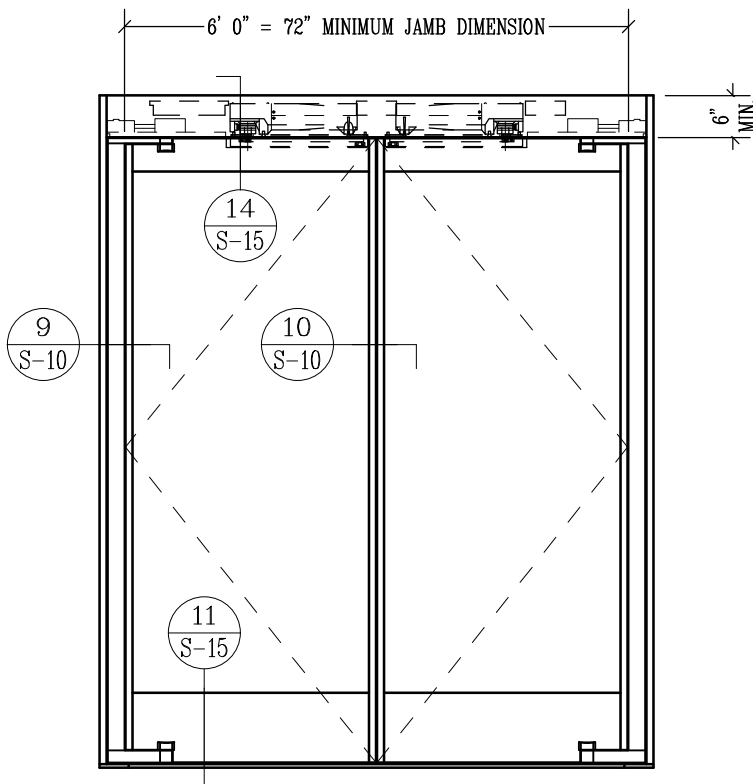



SHOWN WITH STANLEY POWER OPERATORS

Exposed Shafts / Stanley "Power Now" Bottom Load (S-2)

INTERIOR

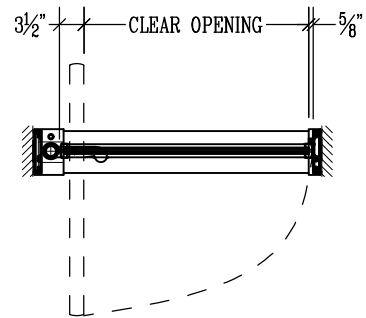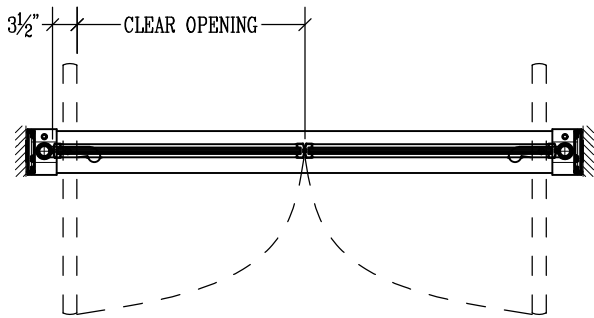



EXTERIOR
(Pull Side)

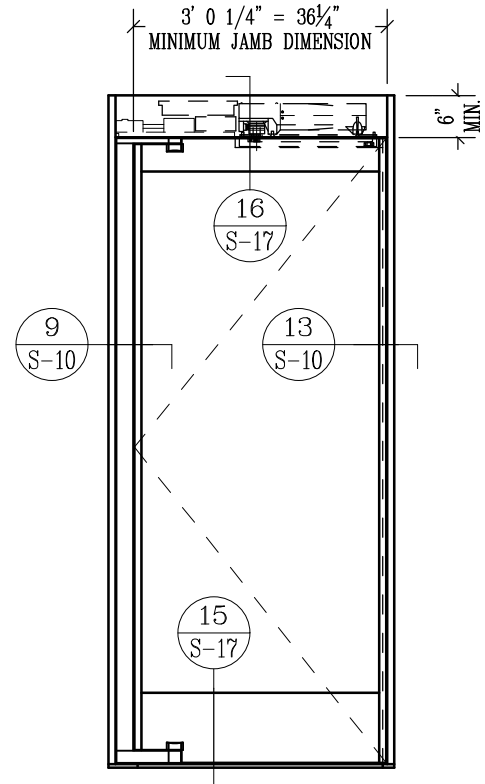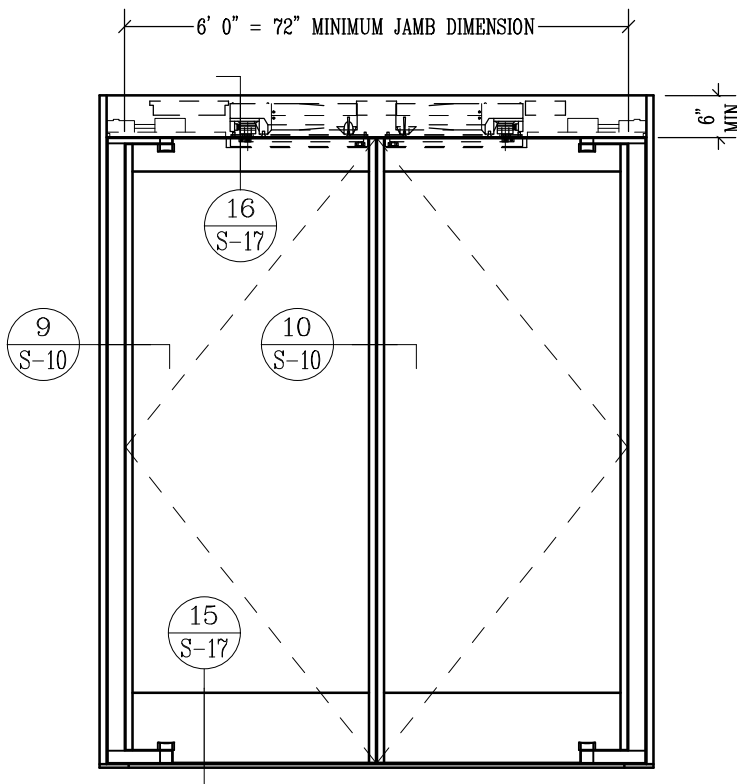



SHOWN WITH STANLEY POWER OPERATORS

Exposed Shafts / Record "Power Now" Side Load (S-2)

INTERIOR

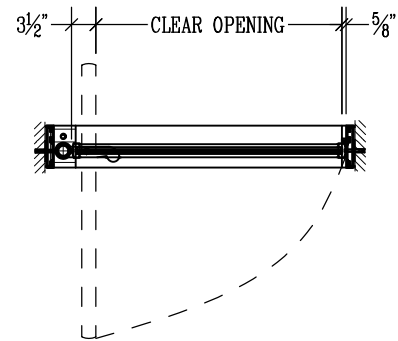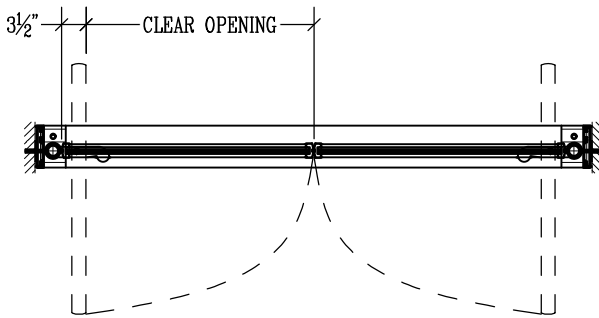


EXTERIOR
(Pull Side)



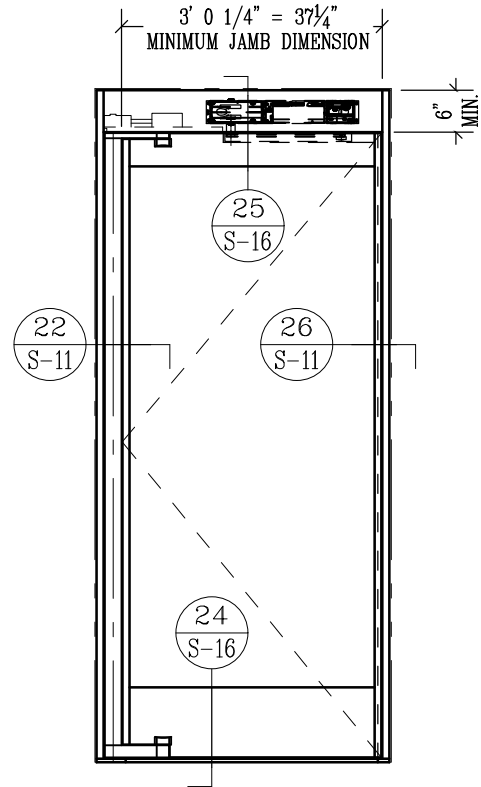
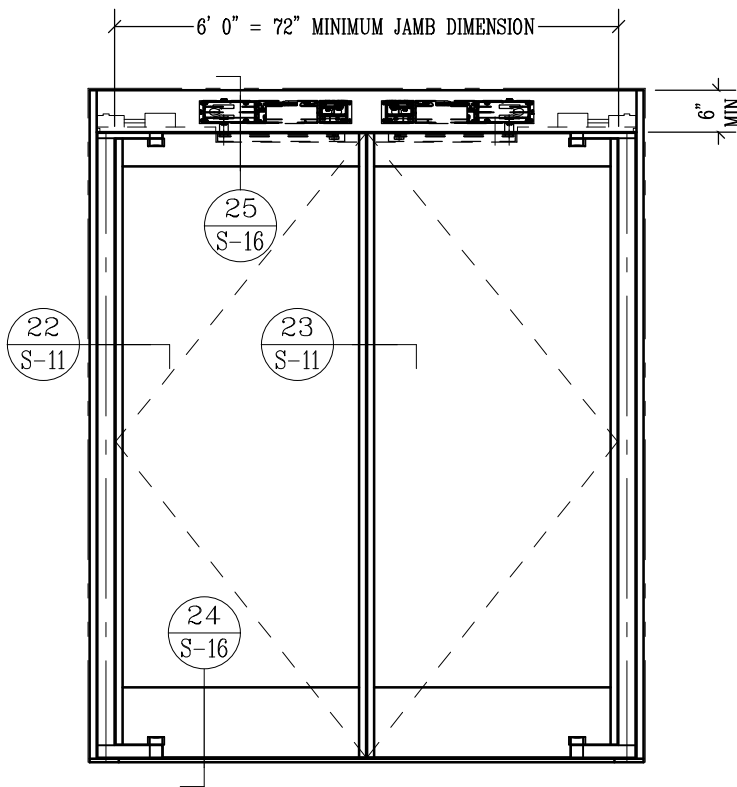


SHOWN WITH RECORD POWER OPERATORS

Horton & Stanley "Power Now" (S-1 & 2)

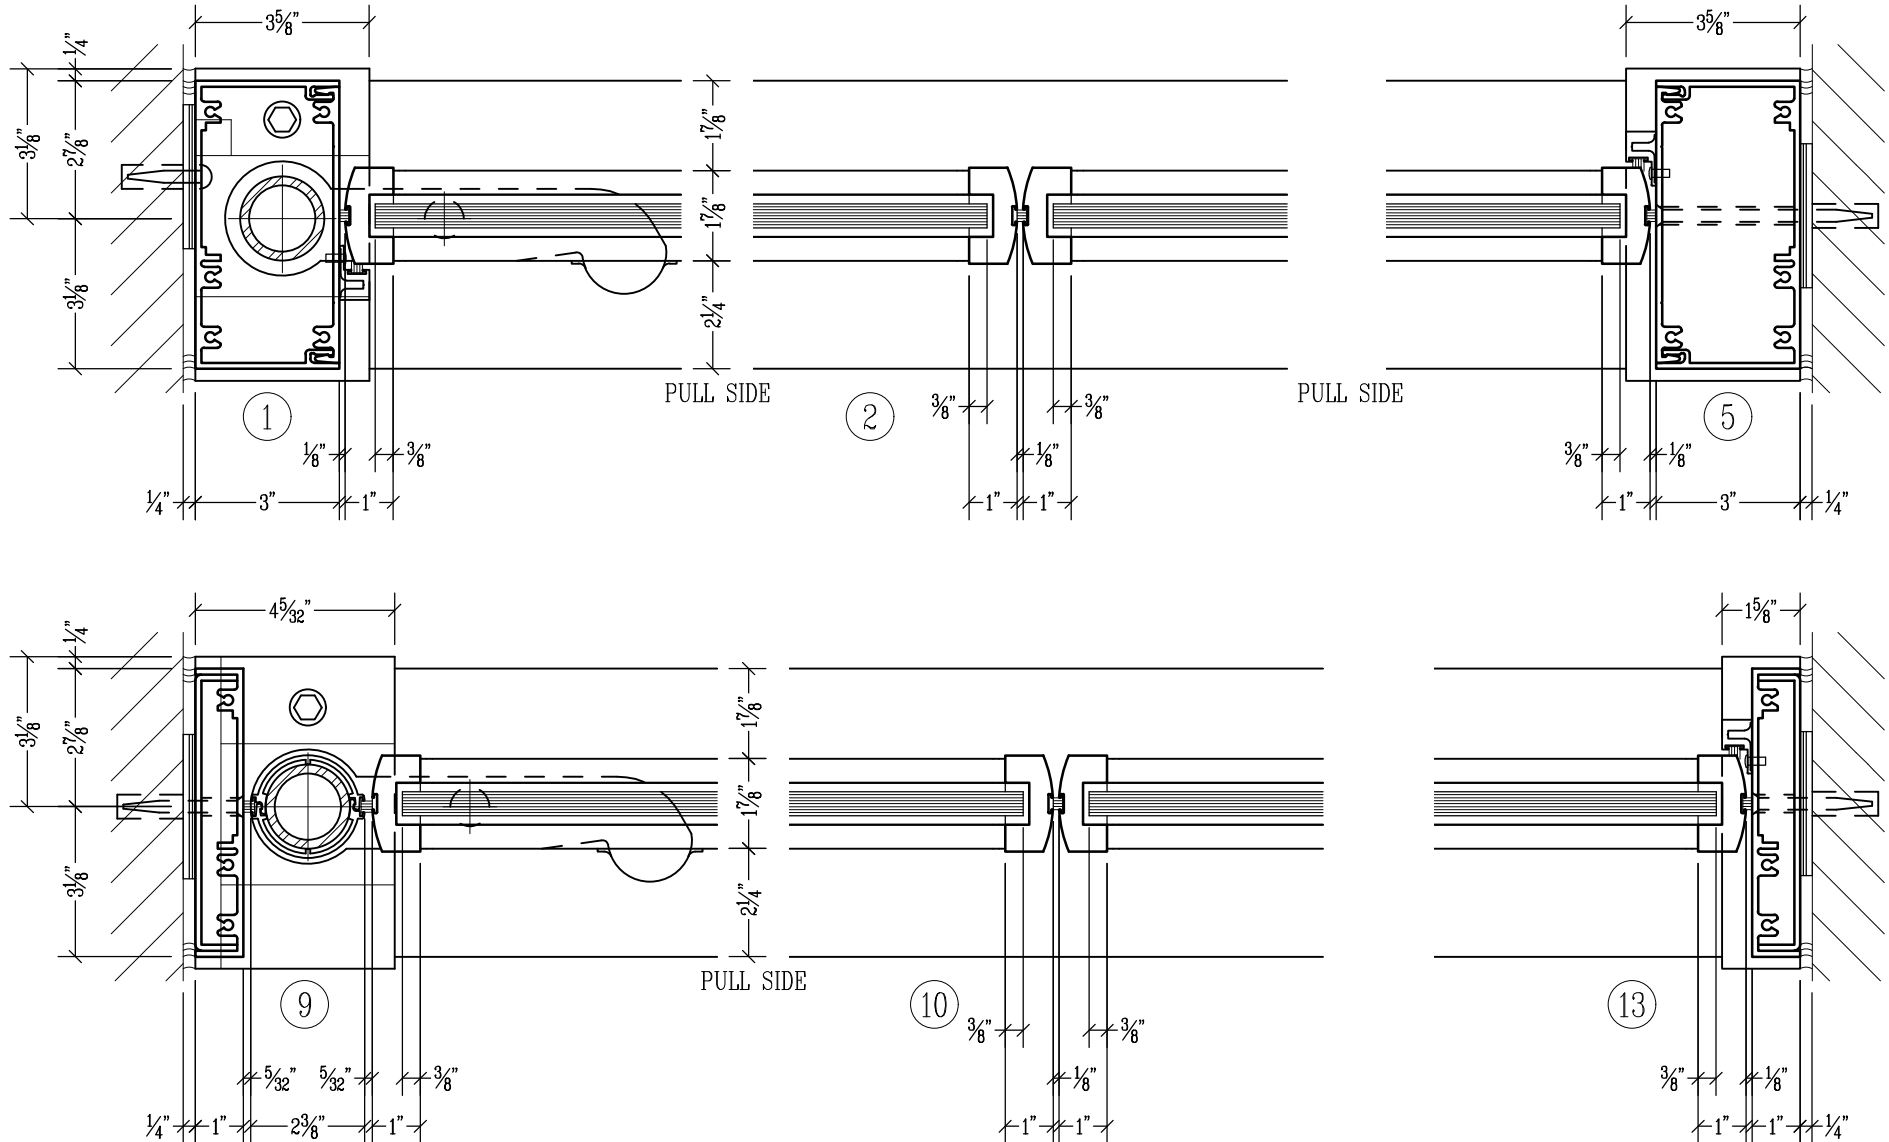


Record "Power Now" (S-1 & 2)

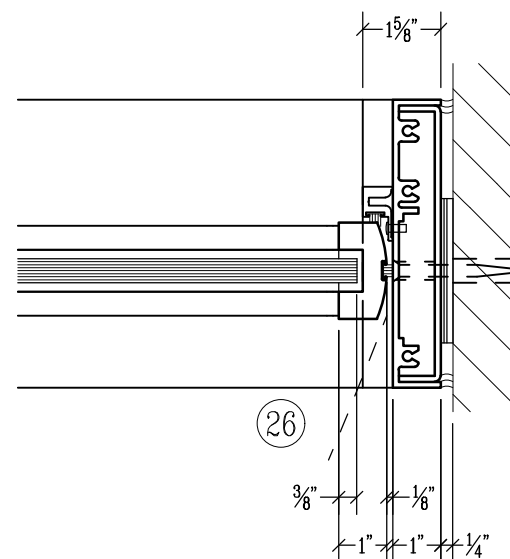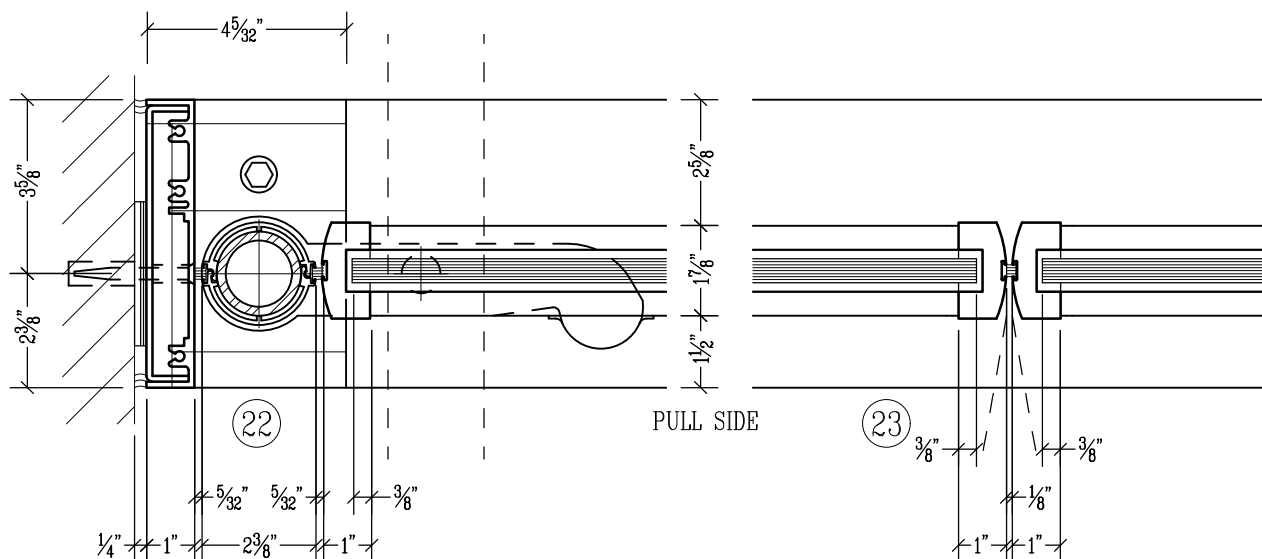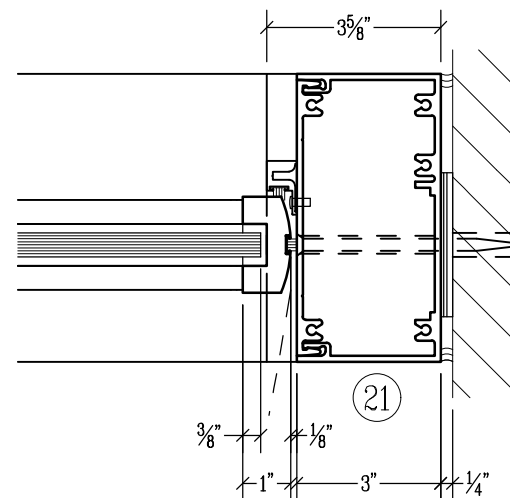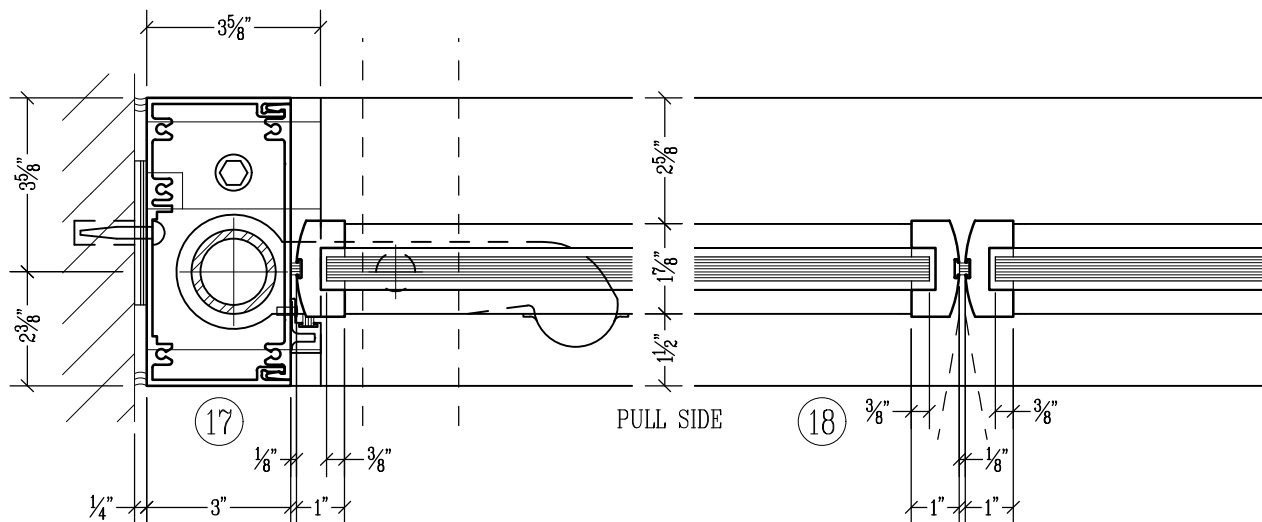


Concealed Shafts / Horton & Stanley "Power Now" Side Load (S-1)

Horton

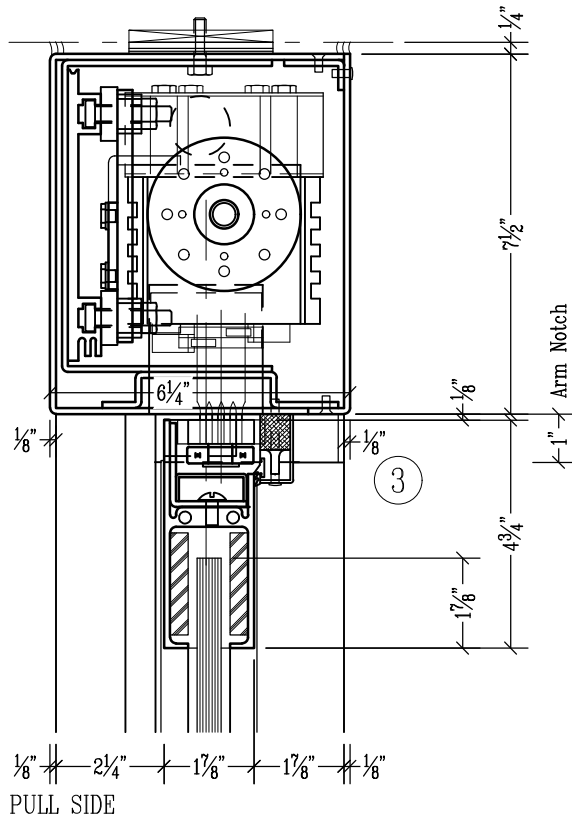


Stanley

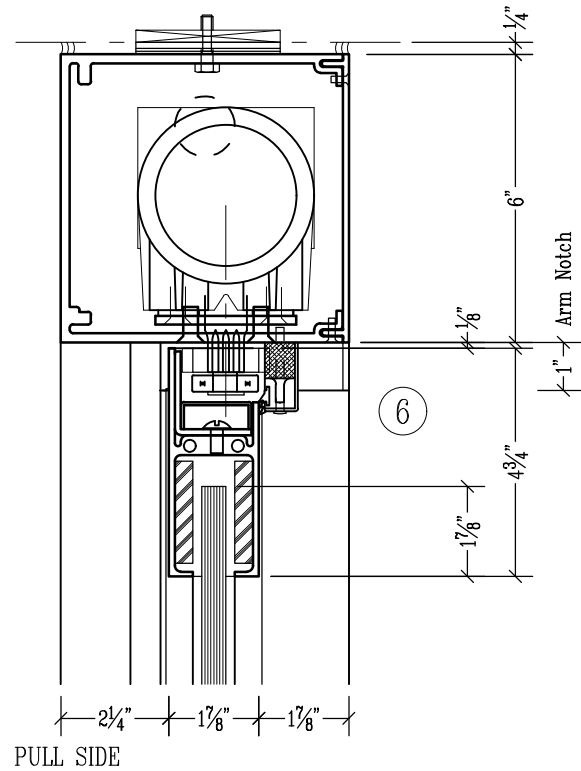

SCALE: 1/4" = 1"


Concealed Shafts / Stanley "Power Now" Bottom Load (S-1)

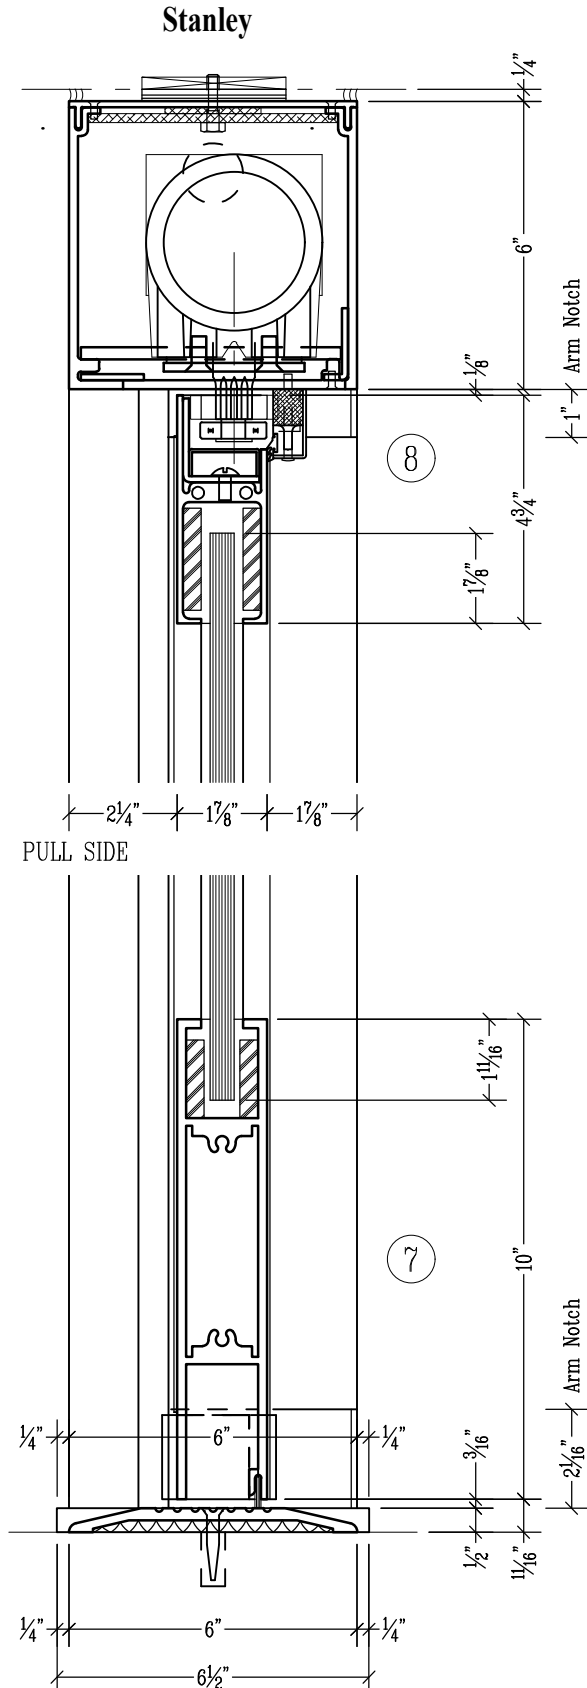

SCALE: $\frac{1}{4}" = 1"$

Concealed Shafts / Record "Power Now" Side Load (S-1)


Record

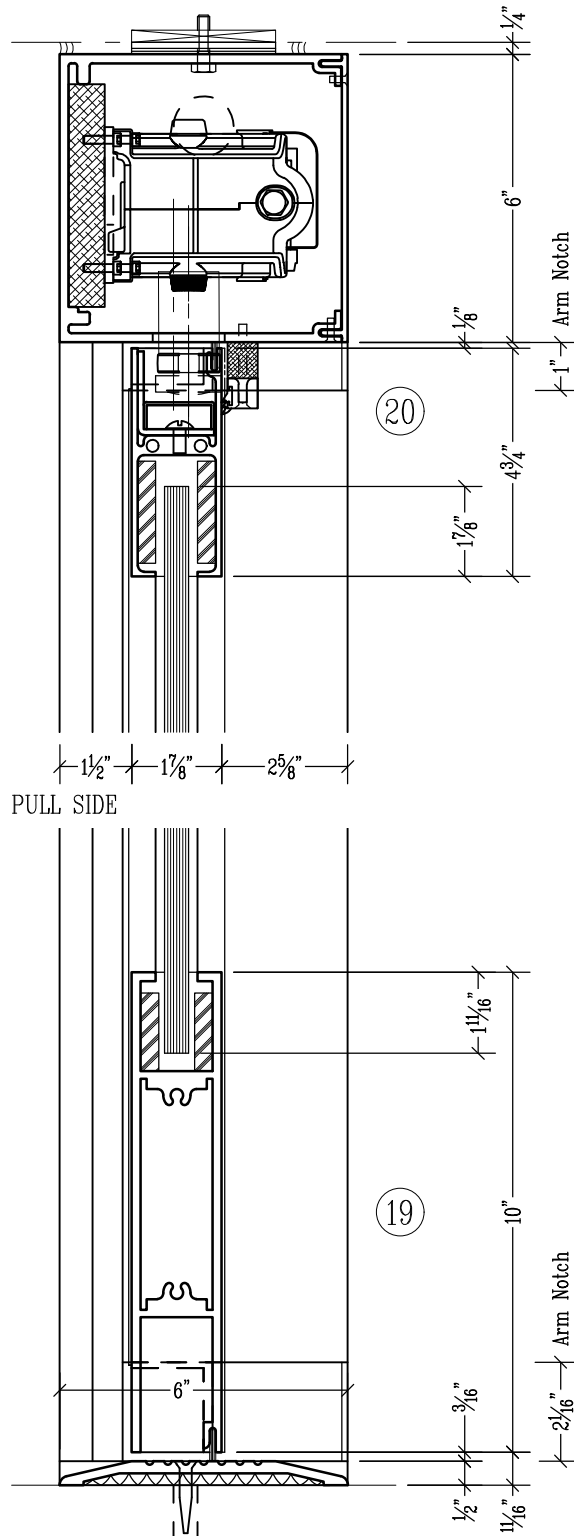

SCALE: 1/4" = 1"


Exposed Shafts / Horton & Stanley "Power Now" Side Load (S-2)

Horton

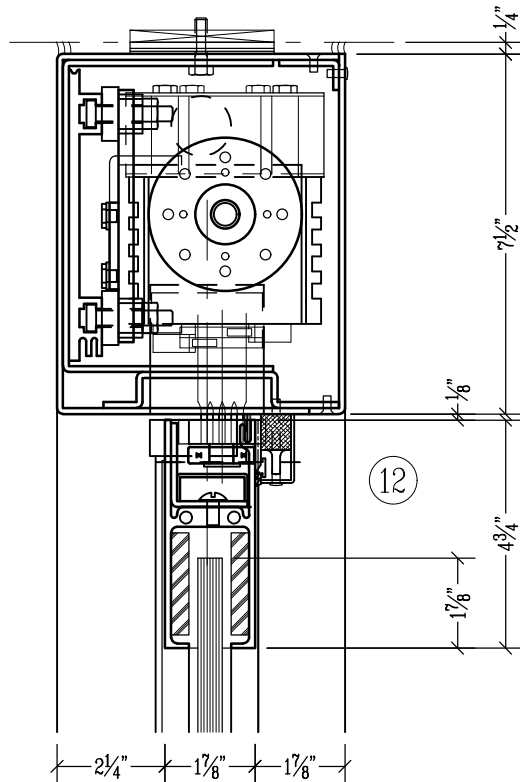


PULL SIDE

Stanley


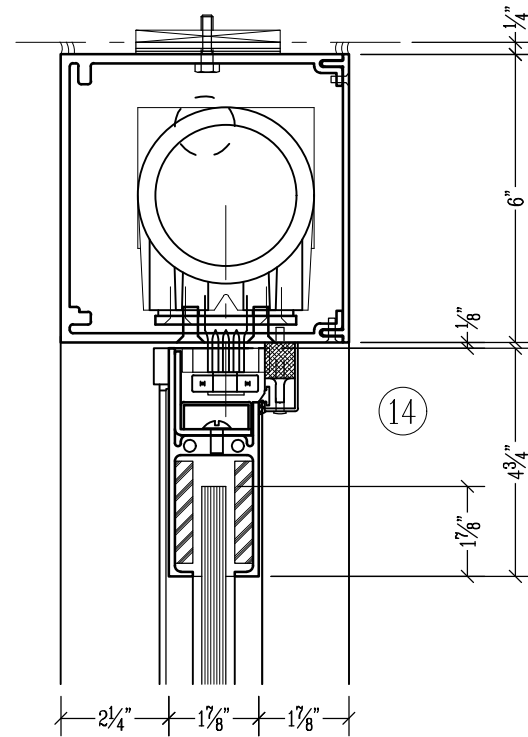


PULL SIDE

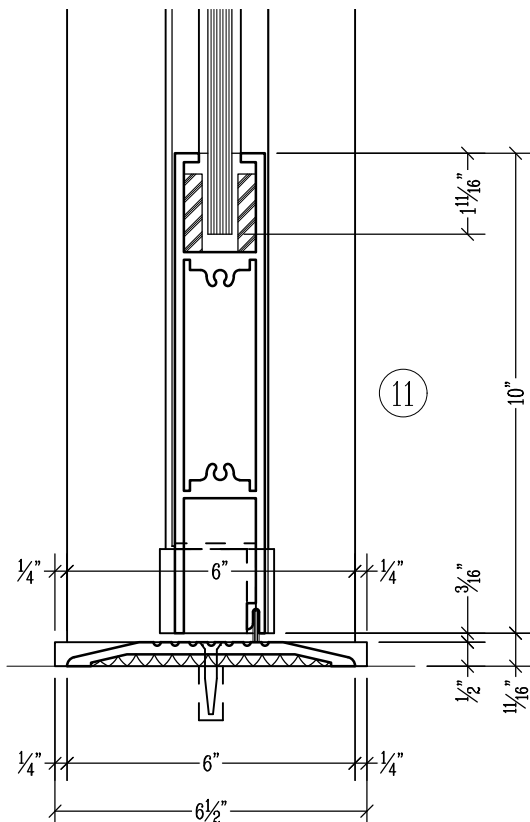

SCALE: 1/4" = 1"


Stanley

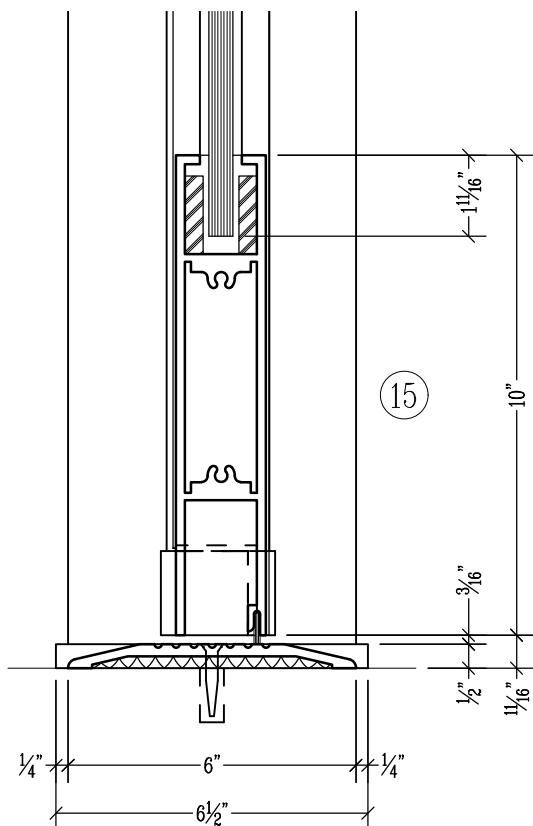

Page No. 16

Exposed Shafts / Record "Power Now" Side Load (S-2)

Record

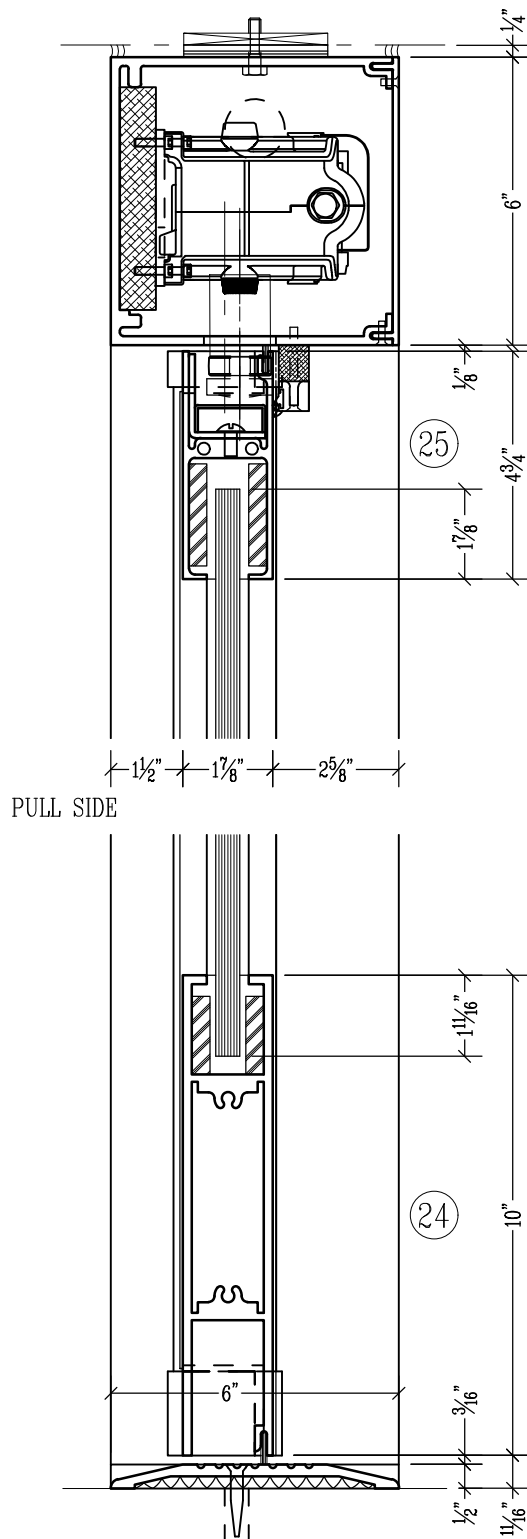

SCALE: 1/4" = 1"